

拖链 -J 系列



Cable Chain - J Series


◎ J 系列塑料拖链款式多样、规格齐全，库存备货充足满足快速交货周期，产品选择范围大（多种打开方式：不可开、内开、封闭、桥式等）可满足不同的解决方案，适用于不同的产品应用领域。

◎ J series cable chain: The various styles、complete specifications and stock is sufficient for fast delivery cycle and the large selection range (multiple opening types: non-opening, exterior opening, closed, bridge, etc.) This series can meet different programs and different product applications.

测试使用寿命达 2 千万次以上
Its tested service life is up to 20 million times.




Contents 产品目录

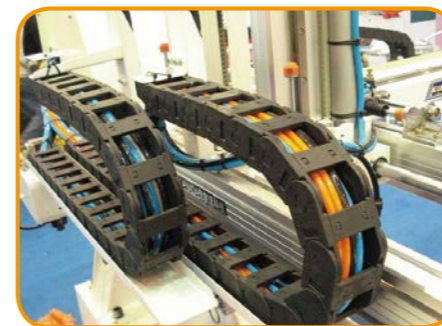

- 26 微型 J07Q.1.B 系列 - 桥式不可打开
Miniature series of J07Q.1.B-Bridge type non-opening
- 27 微型 J10Q.1.B 系列 - 桥式不可打开
Miniature series of J10Q.1.B-Bridge type non-opening
- 28 微型 J10BF.1.B 系列 - 半封闭不可打开
Miniature series of J10BF.1.B-Semi-enclosed type non-opening
- 29 J15Q.1.B 系列 - 桥式不可打开
Series of J15Q.1.B-Bridge type non-opening
- 30 J15BF.1.N 系列 - 半封闭内侧打开
Series of J15BF.1.N Semi-enclosed type interior opening
- 31 J15BF.2.N 系列 - 半封闭内侧打开
Series of J15BF.2.N Semi-enclosed type interior opening
- 32 JE15Q.1.F 系列 - 桥式方便型
Series of JE15Q.1.F Bridge type Convenient type
- 33 J18Q.1.B 系列 - 封闭不可打开
Series of J18Q.1.B-Enclosed type non-opening
- 34 J18Q.2.W 系列 - 桥式外侧开
Series of J18Q.2.W-Bridge type exterior opening
- 35 J18BF.1.N 系列 - 半封闭内侧打开
Series of J18BF.1.N Semi-enclosed type interior opening
- 36 J18F.1.B 系列 - 桥式不可打开
Series of J18F.1.B-Bridge type non-opening
- 37 J25Q.1.S 系列 - 桥式两侧可打开
Series of J25Q.1.S-Bridge type open of both side
- 38 J25F.1.S 系列 - 封闭两侧可打开
Series of J25F.1.S-Enclosed type both side opening
- 39 J25Q.2.S 系列 - 桥式两侧可打开
Series of J25Q.2.S-Bridge type open of both side
- 40 J25F.2.S 系列 - 封闭两侧可打开
Series of J25F.2.S-Enclosed type both side opening
- 41 J25Q.3.N 系列 - 桥式内侧可打开
Series of J25Q.3.N-Bridge type interior opening
- 42 J30Q.1.S 系列 - 桥式两侧可打开
Series of J30Q.1.S-Bridge type open of both side
- 43 J30F.1.S 系列 - 封闭两侧可打开
Series of J30F.1.S-Enclosed type both side opening
- 44 J35Q.1.S 系列 - 桥式两侧可打开
Series of J35Q.1.S-Bridge type open of both side
- 45 J35F.1.S 系列 - 封闭两侧可打开
Series of J35F.1.S-Enclosed type both side opening
- 46 J35Q.2.S 系列 - 桥式两侧可打开
Series of J35Q.2.S-Bridge type open of both side
- 47 J35Q.3.W 系列 (连体) - 桥式外侧开
Series of J35Q.3.W(Connection)-Bridge type exterior opening
- 48 J45Q.1.S 系列 - 桥式两侧可打开
Series of J45Q.1.S-Bridge type open of both side
- 49 J45F.1.S 系列 - 封闭两侧可打开
Series of J45F.1.S-Enclosed type both side opening
- 50 J60Q.1.S 系列 - 桥式两侧可打开
Series of J60Q.1.S-Bridge type open of both side

拓展系列 Series of Expand


- 51 JT60Q.1.S 系列 - 两侧可打开
Series of JT60Q.1.S-open of both side

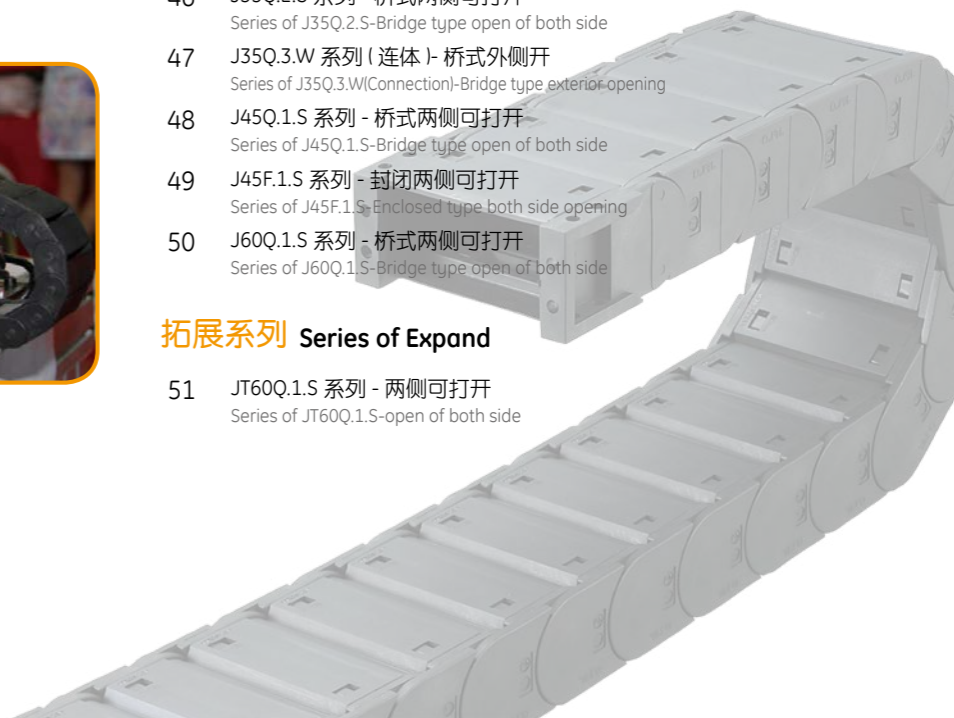

微型 J07Q.1.B 系列 - 桥式不可打开


Miniature series of J07Q.1.B-Bridge type non-opening

JFLO®

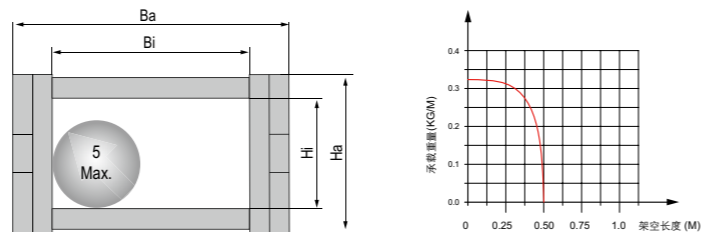

适用于直径 5 毫米以下线缆 Suitable for 5mm or less of cable.

主要技术参数 Basic technical data

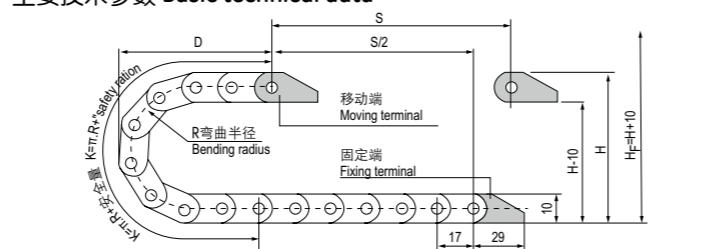


节距=16.7mm, 每米节数=59, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=16.7mm, link per meter=60, length of chain=S/2+K, S=stroke, K=π.R+“safety ration”

R	15	28
H	40	66
D	37	50
K	86	136

安装实际高度:H_r=H+10mm(负载 0.1kg/m)
Actual mounting height:H_r=H+10mm(load 0.1kg/m)

示意图 Drawing

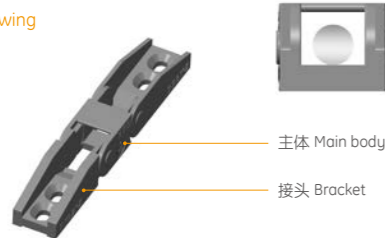


主体 Main body
接头 Bracket

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J07Q.1.07B	7	7	10	12	Q.B	15,28	X ₁	3.1*4.4L	8	29	5	12	J07Q.1.07B-XJT		

单位 (unit): mm

注: B 表示不可打开 Note: B indicates that non-opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



X₁ 型接头 X₁ type bracket

订货示例 Order Example

示例 拖链内高 7mm、内宽 7mm、半径 15mm、长度 0.5 米 /30 节 (Sample: inner height 7mm, inner width 7mm, radius 15mm, length 30 links/0.5 meter)

拖链 Chain J07Q.1.07B R15 500mm /30 Links
接头 Bracket J07Q.1.07B-XJT 1 副 (Set)



配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JFLO®


微型 J10Q.1.B 系列 - 桥式不可打开

Miniature series of J10Q.1.B-Bridge type non-opening

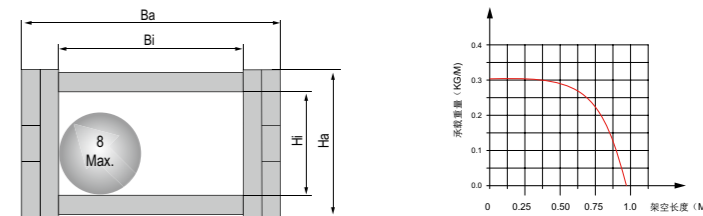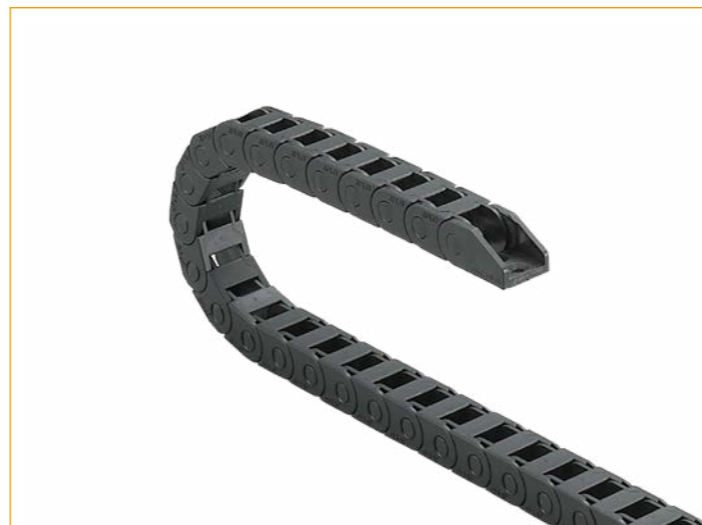

适用于直径 8 毫米以下线缆 Suitable for 8mm or less of cable.

主要技术参数 Basic technical data

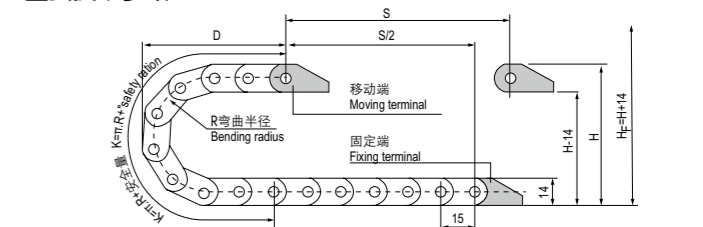


J10Q.1.10B:
节距=15mm, 每米节数=66, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=15mm, link per meter=66, length of chain=S/2+K, S=stroke, K=π.R+“safety ration”
J10Q.1.15B, J10Q.1.20B:
节距=20mm, 每米节数=50, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=20mm, link per meter=50, length of chain=S/2+K, S=stroke, K=π.R+“safety ration”

R	18	28	38
H	50	70	90
D	40	50	60
K	90	120	150

安装实际高度:H_r=H+13.5mm(负载 0.2kg/m)
Actual mounting height:H_r=H+13.5mm(load 0.2kg/m)

示意图 Drawing

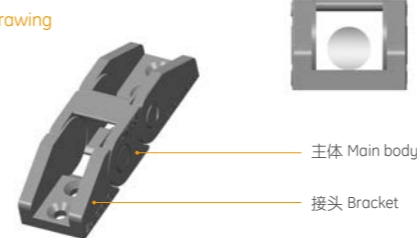


主体 Main body
接头 Bracket

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J10Q.1.10B	10	10	14	18	Q.B	18,28	X ₁	3.2	8	22	4	17	J10Q.1.10B-XJT		
J10Q.1.15B	10	15	15	23	Q.B	18,28,38	X ₁	4*7L	10	C1=31 C2=27	8	23	J10Q.1.15B-XJT		
J10Q.1.20B	10	20	15	28	Q.B	18,28	X ₁	3.2*7L	10	C1=30 C2=27	8	28	J10Q.1.20B-XJT		

单位 (unit): mm

注: B 表示不可打开 Note: B indicates that non-opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



X₁ 型接头 X₁ type bracket

订货示例 Order Example

示例 拖链内高 10mm、内宽 10mm、半径 18mm、长度 0.5 米 /33 节 (Sample: inner height 10mm, inner width 10mm, radius 18mm, length 33 links/0.5 meter)

拖链 chain J10Q.1.10B R18 500mm /33 Links
接头 Bracket J10Q.1.10B-XJT 1 副 (Set)


配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

微型 J10BF.1.B 系列 - 半封闭不可打开


Miniature series of J10BF.1.B-Semi-enclosed type non-opening

JFLO®

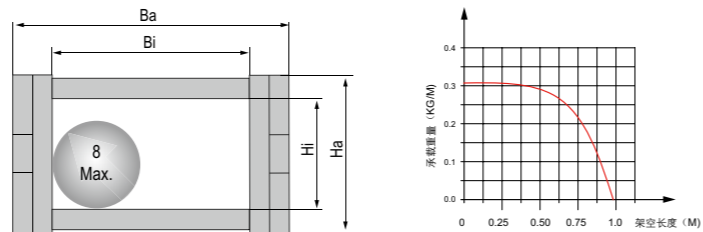

适用于直径 8 毫米以下线缆 Suitable for 8mm or less of cable.

主要技术参数 Basic technical data

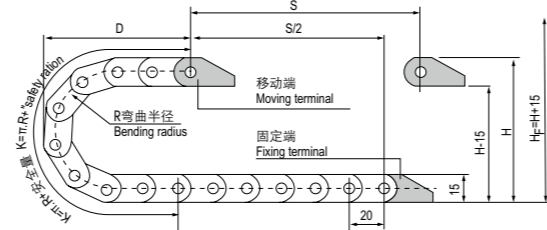


节距=20mm, 每米节数=50, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=20mm, link per meter=50, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	28	38
H	71	91
D	56	66
K	140	160

安装实际高度: $H_f = H + 15\text{mm}$ (负载 0.2kg/m)
Actual mounting height: $H_f = H + 15\text{mm}$ (load 0.2kg/m)

示意图 Drawing

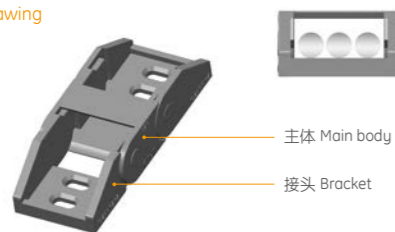


主体 Main body
接头 Bracket

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters						
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm) hole distance				接头代号 Bracket No.
J10BF.1.15B	10	15	15	23	BF.B	28	X_1	4*7L	10	C1=30 C2=27	7	23	J10BF.1.15B-XJT
J10BF.1.20B	10	20	15	28	BF.B	28,38	X_6	4*7L	10	C1=30 C2=28	7	28	J10BF.1.20B-XJT


单位 (unit): mm

注: B 表示不可打开 Note: B indicates that non-opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



X_1 型接头 X_1 type bracket



X_6 型接头 X_6 type bracket

订货示例 Order Example

示例 拖链内高 10mm、内宽 15mm、半径 28mm、长度 0.5 米 /25 节 (Sample: inner height 10mm, inner width 15mm, radius 28mm, length 25 links/0.5 meter)

拖链 chain J10BF.1.15B R28 500mm /25 Links

接头 Bracket J10BF.1.15B-XJT 1 副 (Set)


配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JFLO®


J15Q.1.B 系列 - 桥式不可打开

Series of J15Q.1.B-Bridge type non-opening

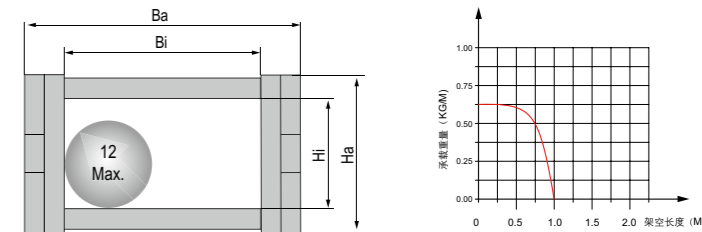

适用于直径 12 毫米以下线缆 Suitable for 12mm or less of cable.

主要技术参数 Basic technical data

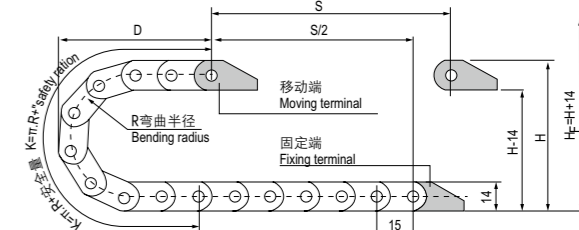

节距=20mm, 每米节数=50, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=20mm, link per meter=50, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	28	38
H	76	96
D	58	68
K	140	160

安装实际高度: $H_f = H + 20\text{mm}$ (负载 0.3kg/m)
Actual mounting height: $H_f = H + 20\text{mm}$ (load 0.3kg/m)

示意图 Drawing



主体 Main body
接头 Bracket
梳状板 Pectinate plate


J15.120-SZB 梳状板 Pectinate plate
J15.130-SZB 梳状板 Pectinate plate

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters						
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm) hole distance				接头代号 Bracket No.
J15Q.1.20B	15	20	20	29	Q.B	28,38	X_2	4.2*7L	11	C1=33 C2=31	8	29	J15Q.1.20B-XJT
J15Q.1.30B	15	30	20	39	Q.B	28	X_2	4.2*7L	14	C1=33 C2=31	8	39	J15Q.1.30B-XJT

单位 (unit): mm

注: B 表示不可打开 Note: B indicates that non-opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



X_2 型接头 X_2 type bracket

订货示例 Order Example

示例 拖链内高 15mm、内宽 20mm、半径 28mm、长度 0.5 米 /25 节 (Sample: inner height 15mm, inner width 20mm, radius 28mm, length 25 links/0.5 meter)

拖链 chain J15Q.1.20B R28 500mm /25 Links

接头 Bracket J15Q.1.20B-XJT 1 副 (Set)


配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

J15BF.1.N 系列 - 半封闭内侧打开


Series of J15BF.1.N Semi-enclosed type interior opening

JFLO®

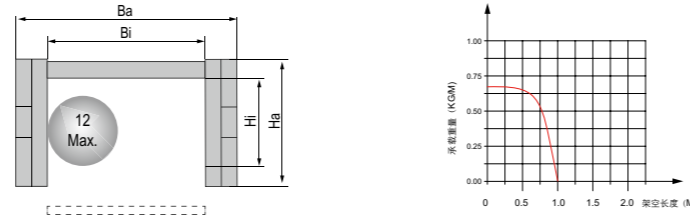

适用于直径 12 毫米以下线缆 Suitable for 12mm or less of cable.


主要技术参数 Basic technical data

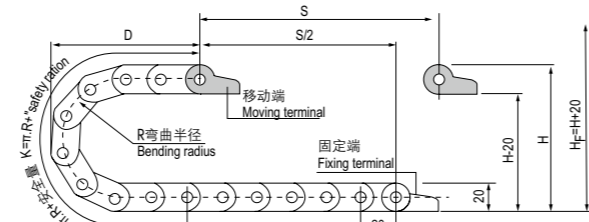

节距=20mm, 每米节数=50, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=20mm, link per meter=50, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	28	38	48
H	76	96	116
D	58	68	78
K	140	160	200


安装实际高度: $H_f = H + 20\text{mm}$ (负载 0.3kg/m)
Actual mounting height: $H_f = H + 20\text{mm}$ (load 0.3kg/m)

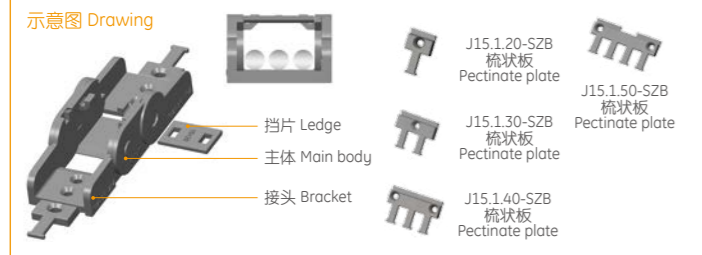

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm) hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J15BF.1.15N	15	15	20	23	BF.N	28	X ₁	4.2*7L	10	33	6	23	J15BF.1.15N-XJT		
J15BF.1.20N	15	20	20	29	BF.N	28,38	X ₁	3.2	8	30	7	29	J15BF.1.20N-XJT		
J15BF.1.30N	15	30	20	39	BF.N	28,38,48	X ₂	4.2*7L	15	30	8	39	J15BF.1.30N-XJT		
J15BF.1.40N	15	40	20	49	BF.N	28,38,48	X ₃	4.2*7L	7	28	30	7	49	J15BF.1.40N-XJT	
J15BF.1.50N	15	50	20	59	BF.N	28,38,48	X ₃	4.2*7L	7	37	30	7	59	J15BF.1.50N-XJT	

注: N 表示内侧打开 Note: N indicates that the interior opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

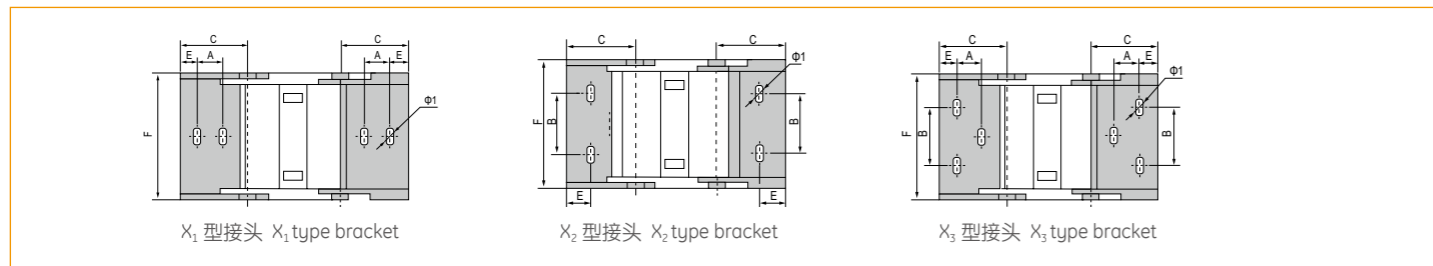

订货示例 Order Example

示例 拖链内高 15mm、内宽 15mm、半径 28mm、长度 1 米 /50 节 (Sample: inner height 15mm, inner width 15mm, radius 28mm, length 1 meter /50 links)

拖链 Chain J15BF.1.15N R28 1000mm /50 Links

接头 Bracket J15BF.1.15N-XJT 1 副 (Set)


配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JFLO®


J15BF.2.N 系列 - 半封闭内侧打开

Series of J15BF.2.N Semi-enclosed type interior opening

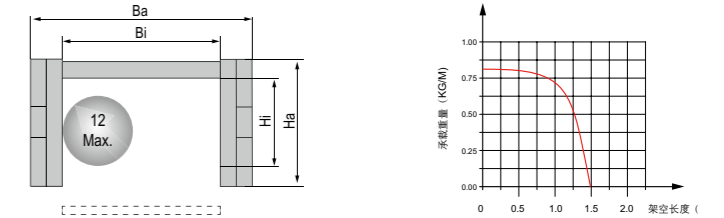

适用于直径 12 毫米以下线缆 Suitable for 12mm or less of cable.


主要技术参数 Basic technical data

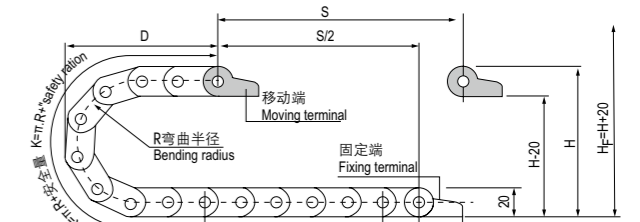

节距=25mm, 每米节数=40, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=25mm, link per meter=40, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	28	38	48
H	76	96	116
D	63	73	83
K	150	175	225

安装实际高度: $H_f = H + 20\text{mm}$ (负载 0.3kg/m)
Actual mounting height: $H_f = H + 20\text{mm}$ (load 0.3kg/m)

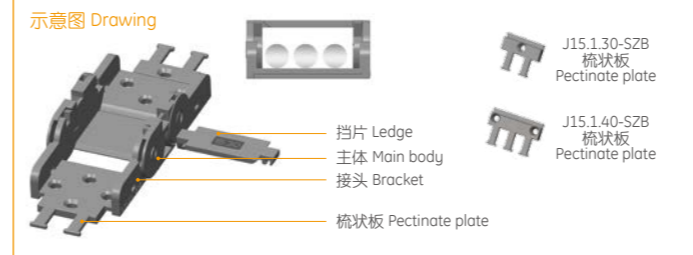

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm) hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J15BF.2.30N	15	30	20	41	BF.N	38,48	X ₃	4.2	A1=8 A2=9	22	30	7	41	J15BF.2.30N-XJT	
J15BF.2.40N	15	40	20	51	BF.N	28	X ₃	4.2*7L	8	28.5	30	7	51	J15BF.2.40N-XJT	

注: N 表示内侧打开 Note: N indicates that the interior opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



订货示例 Order Example

示例 拖链内高 15mm、内宽 30mm、半径 38mm、长度 1 米 /40 节 (Sample: inner height 15mm, inner width 30mm, radius 38mm, length 1 meter /40 links)

拖链 Chain J15BF.2.30N R38 1000mm /40 Links

接头 Bracket J15BF.2.30N-XJT 1 副 (Set)


配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JE15Q.1.F 系列 - 桥式方便型


Series of JE15Q.1.F Bridge type Convenient type

JFLO®

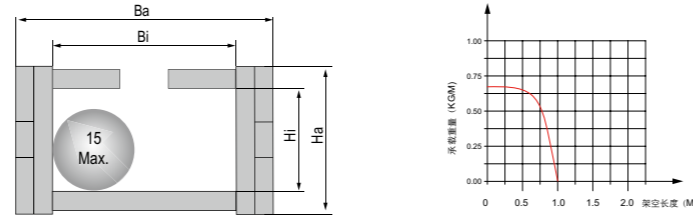

适用于直径 15 毫米以下线缆 Suitable for 15mm or less of cable.

主要技术参数 Basic technical data

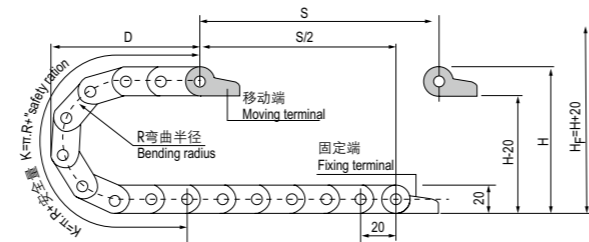

节距=20mm, 每米节数=50, 链长=S/2+K, S=行程距离, K=π.R+安全量
Pitch=20mm, link per meter=50, length of chain=S/2+K, S=stroke. K=π.R+safety ration

R	28	38	48
H	76	96	116
D	58	68	78
K	140	160	200

安装实际高度: $H_f = H + 20\text{mm}$ (负载 0.3kg/m)
Actual mounting height: $H_f = H + 20\text{mm}$ (load 0.3kg/m)

示意图 Drawing




拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters						
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm) hole distance				接头代号 Bracket No.
JE15Q.1.16F	15	16	20	24	Q.F	28 38 48	X ₁	3.2	8	28	5	24	JE15Q.1.16F-XJT
JE15Q.1.20F	15	20	20	28	Q.F		X ₁	3.2	8	28	5	28	JE15Q.1.20F-XJT

单位 (unit): mm

注: F 表示方便型 Note: F indicates that the Convenient type

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



X₁ 型接头 X₁ type bracket

订货示例 Order Example

示例 拖链内高 15mm、内宽 16mm、半径 28mm、长度 1 米 /50 节 (Sample: inner height 15mm, inner width 15mm, radius 28mm, length 50 links/1 meter)

拖链 Chain JE15Q.1.16F R28 1000mm /50 Links

接头 Bracket JE15Q.1.16F-XJT 1 副 (Set)



配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JFLO®


J18Q.1.B 系列 - 桥式不可打开

Series of J18Q.1.B-Bridge type non-opening

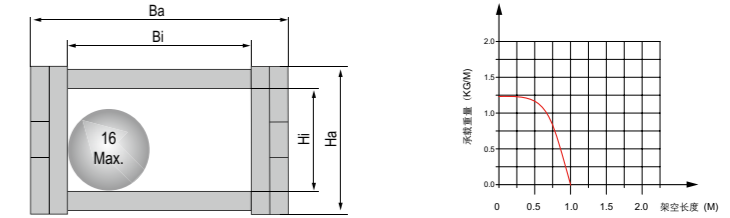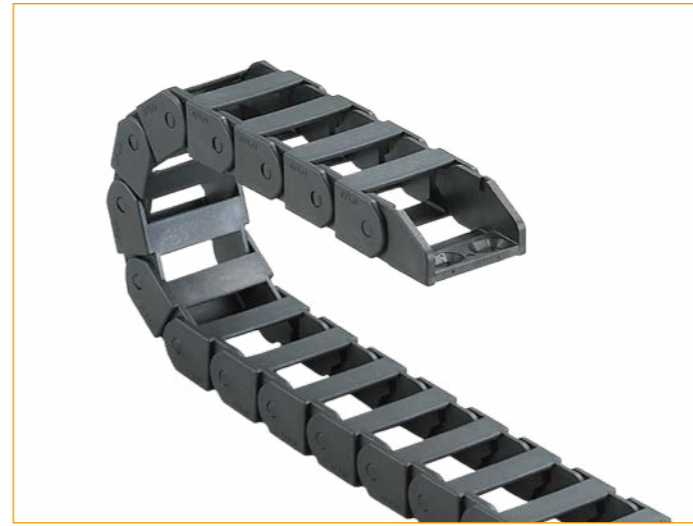

适用于直径 16 毫米以下线缆 Suitable for 16mm or less of cable.

主要技术参数 Basic technical data

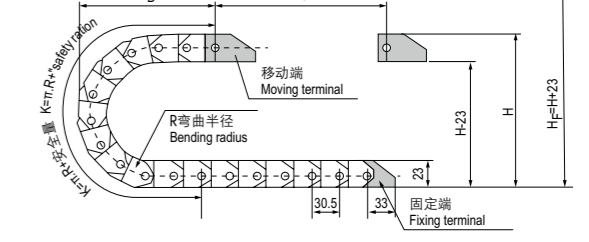

节距=30.5mm, 每米节数=33, 链长=S/2+K, S=行程距离, K=π.R+安全量
Pitch=30.5mm, link per meter=33, length of chain=S/2+K, S=stroke. K=π.R+safety ration

R	28	38	48	75	100
H	79	99	119	173	223
D	70	80	90	117	142
K	153	183	214	305	397

安装实际高度: $H_f = H + 23\text{mm}$ (负载 0.5kg/m)
Actual mounting height: $H_f = H + 23\text{mm}$ (load 0.5kg/m)

示意图 Drawing




拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters						
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm) hole distance				接头代号 Bracket No.
J18Q.1.25B	18	25	23	36	Q.B	28,38,48,75,100	X ₂	5.2	14.5	33	7	36	J18Q.1.25B-XJT
J18Q.1.37B	18	37	23	48	Q.B	28,38,48,75	X ₂	5.2*10L	20	33	7	48	J18Q.1.37B-XJT

单位 (unit): mm

注: B 表示不可打开 Note: B indicates that non-opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



X₂ 型接头 X₂ type bracket

订货示例 Order Example

示例 拖链内高 18mm、内宽 25mm、半径 28mm、长度 1 米 /33 节 (Sample: inner height 18mm, inner width 25mm, radius 28mm, length 33 links/1 meter)

拖链 chain J18Q.1.25B R28 1000mm /33 Links

接头 Bracket J18Q.1.25B-XJT 1 副 (Set)


配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

J18Q.2.W 系列 - 桥式外侧开


Series of J18Q.2.W-Bridge type exterior opening

JFLO®

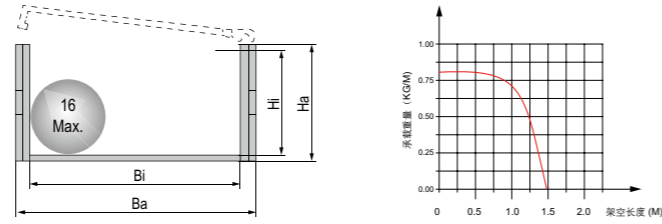

适用于直径 16 毫米以下线缆 Suitable for 16mm or less of cable.

主要技术参数 Basic technical data

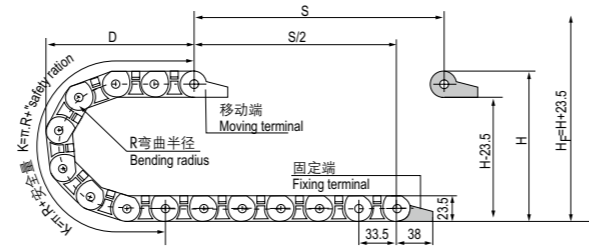


节距=33.5mm, 每米节数=30, 链长=S/2+K, S=行程距离, $K=\pi \cdot R$ "安全量"
Pitch=33.5mm, link per meter=30, length of chain=S/2+K, S=stroke. $K=\pi \cdot R$ "safety ration"

R	38	48	60	75	100
H	100	120	144	174	224
D	84	94	106	121	146
K	201	235	268	335	402

安装实际高度: $H_f=H+23.5\text{mm}$ (负载 0.5kg/m)
Actual mounting height: $H_f=H+23.5\text{mm}$ (load 0.5kg/m)


示意图 Drawing

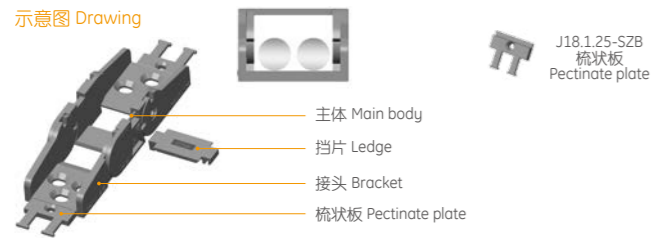

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters							
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm)hole distance					接头代号 Bracket No.
J18Q.2.25W	18	25	23.5	35	Q.W	38,48,60,75,100	X_4	5.2*7L	10	B1=16 B2=14	38	8	35	J18Q.2.25W-XJT

注: W 表示外侧开 Note: W Bridge type exterior opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

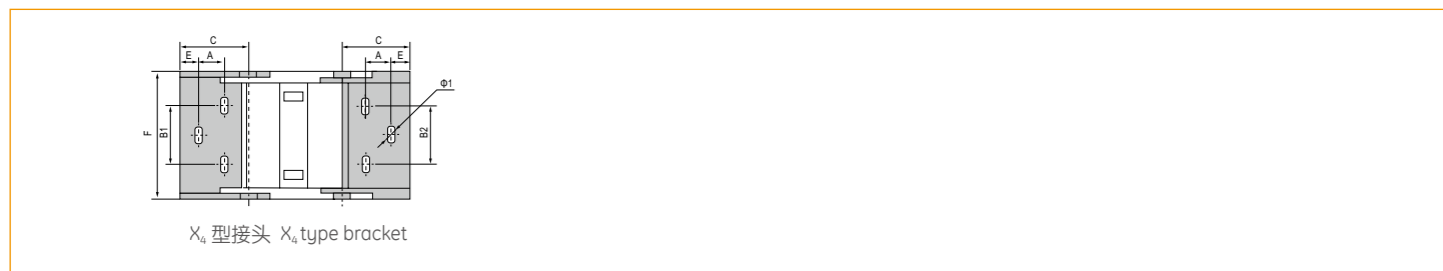

订货示例 Order Example

示例 拖链内高 18mm、内宽 25mm、半径 38mm、长度 1 米 /30 节 (Sample: inner height 18mm, inner width 25mm, radius 38mm, length 30 links/1 meter)

拖链 chain J18Q.2.25W R38 1000mm/30 Links
接头 Bracket J18Q.2.25W-XJT 1 副 (Set)


配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JFLO®


J18BF.1.N 系列 - 半封闭内侧打开

Series of J18BF.1.N Semi-enclosed type interior opening

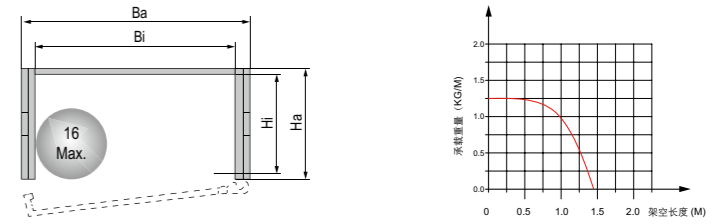

适用于直径 16 毫米以下线缆 Suitable for 16mm or less of cable.

主要技术参数 Basic technical data

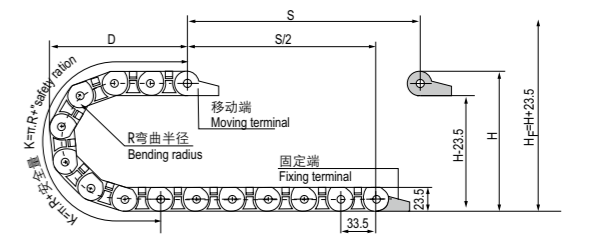


节距=33.5mm, 每米节数=30, 链长=S/2+K, S=行程距离, $K=\pi \cdot R$ "安全量"
Pitch=33.5mm, link per meter=30, length of chain=S/2+K, S=stroke. $K=\pi \cdot R$ "safety ration"

R	28	38	48	60	75
H	80	100	120	144	174
D	74	84	94	106	121
K	168	201	235	268	335

安装实际高度: $H_f=H+23.5\text{mm}$ (负载 0.5kg/m)
Actual mounting height: $H_f=H+23.5\text{mm}$ (load 0.5kg/m)


示意图 Drawing

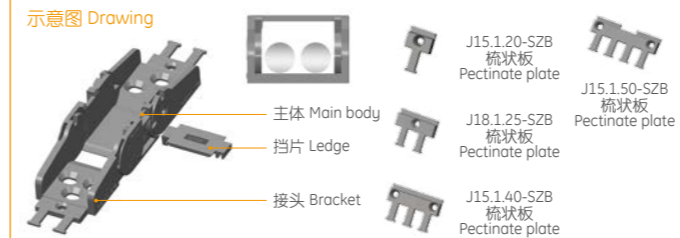

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters							
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm)hole distance					接头代号 Bracket No.
J18BF.1.18N	18	18	23.5	29	BF.N	28,38,48	X_2	5.2*7L 5.2	B1=12 B2=10	33	15	29	J18BF.1.18N-XJT	
J18BF.1.25N	18	25	23.5	36	BF.N	28,38,48,60,75	X_4	5*10L	B1=16 B2=14	38	8	36	J18BF.1.25N-XJT	
J18BF.1.37N	18	37	23.5	49	BF.N	28,38,48,75	X_4	5.2*7L	11	25	33	7	49	J18BF.1.37N-XJT
J18BF.1.50N	18	50	23.5	61	BF.N	28,38,48,75	X_4	5.2*8L	7.6	35	33	5	61	J18BF.1.50N-XJT

注: N 表示内侧打开 Note: N indicates that the interior opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

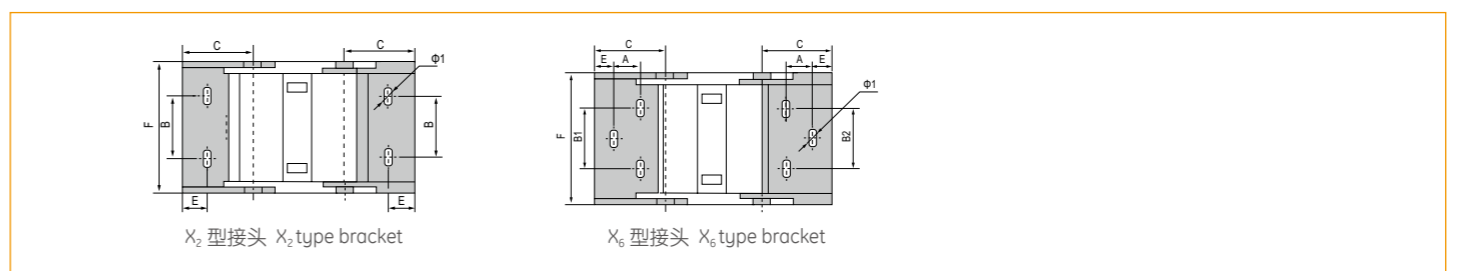

订货示例 Order Example

示例 拖链内高 18mm、内宽 18mm、半径 38mm、长度 1 米 /30 节 (Sample: inner height 18mm, inner width 18mm, radius 38mm, length 30 links/1 meter)

拖链 chain J18BF.1.18N R38 1000mm/30 Links
接头 Bracket J18BF.1.18N-XJT 1 副 (Set)


配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

J18F.1.B 系列 - 封闭不可打开


Series of J18F.1.B-Enclosed type non-opening

JFLO®

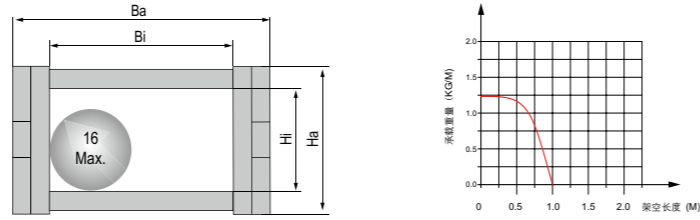

适用于直径 16 毫米以下线缆 Suitable for 16mm or less of cable.

主要技术参数 Basic technical data

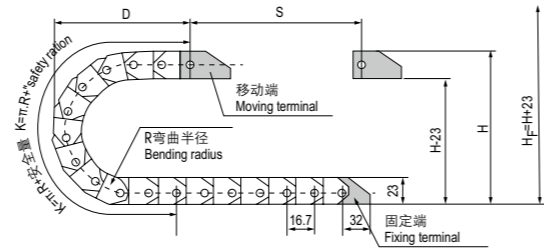

节距=16.7mm, 每米节数=60, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=16.7mm, link per meter=60, length of chain=S/2+K, stroke.K=π.R+“safety ration”

R	28	38	48	75
H	79	99	119	173
D	56	66	76	103
K	134	167	200	284

安装实际高度:H_f=H+23mm(负载 0.5kg/m)
Actual mounting height:H_f=H+23mm(load 0.5kg/m)


示意图 Drawing



拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters							
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance				接头代号 Bracket No.	
J18F.1.25B	18	25	23	35	F.B	28 38 48 75	X ₄	5.2	10	14	32	7.5	35	J18F.1.25B-XJT
J18F.1.37B	18	37	23	47	F.B				10	25	32	7.5	47	

注: B 表示不可打开 Note: B indicates that non-opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

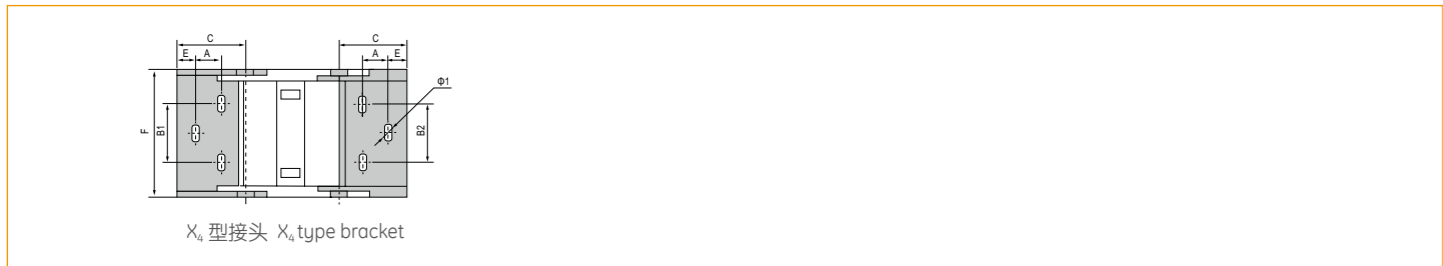

订货示例 Order Example

示例 拖链内高 18mm、内宽 25mm、半径 28mm、长度 1 米 /60 节 (Sample: inner height 18mm, inner width 25mm, radius 28mm, length 1000mm /60 links)

拖链 chain J18F.1.25B R28 1000mm /33 Links
接头 Bracket J18F.1.25B-XJT 1 副 (Set)


配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JFLO®


J25Q.1.S 系列 - 桥式两侧可打开

Series of J25Q.1.S-Bridge type open of both side

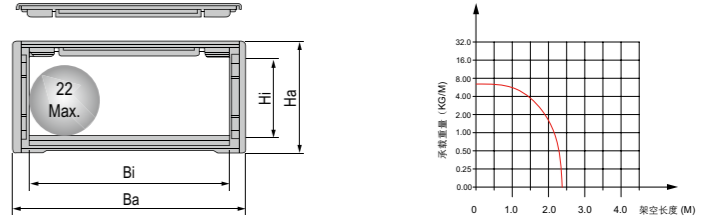

适用于直径 22 毫米以下线缆 Suitable for 22mm or less of cable.

主要技术参数 Basic technical data

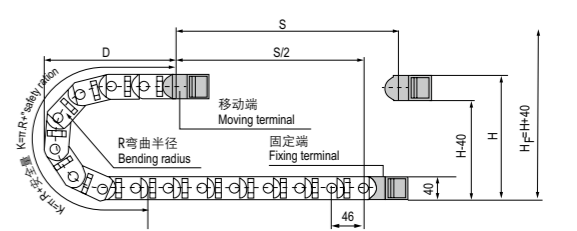


节距=46mm, 每米节数=22, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=46mm, link per meter=22, length of chain=S/2+K, stroke.K=π.R+“safety ration”

R	55	63	75	100	125	150	225
H	150	166	190	240	290	340	490
D	121	129	141	166	191	216	291
K	276	322	368	414	506	598	828

安装实际高度:H_f=H+40mm(负载 1.0kg/m)
Actual mounting height:H_f=H+40mm(load 1.0kg/m)


示意图 Drawing

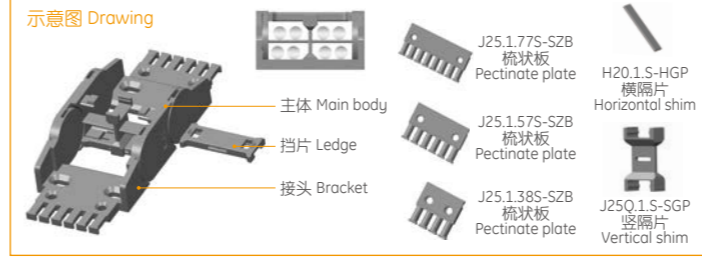

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters										
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance				接头代号 Bracket No.				
J25Q.1.38S	25	38	40	55	Q.S	55,63,75,100, 125, 150,225	X ₂	6.2*12L	25	43	10	54	J25Q.1.38S-XJT				
J25Q.1.50S	25	50	40	67	Q.S				F-Q	6	13	63	47	15	13	72	J25Q.1.38S-FJT
J25Q.1.57S	25	57	40	74	Q.S		X ₂	6.2*12L	44	43	10.2	73	J25Q.1.57S-XJT				
J25Q.1.60S	25	60	40	77	Q.S				F-Q	6	13	85	47	15	13	94	J25Q.1.60S-FJT
J25Q.1.75S	25	75	40	92	Q.S		X ₅	6.2*12L	13	100	47	15	13	109	J25Q.1.75S-FJT		
J25Q.1.77S	25	77	40	94	Q.S				F-Q	6	64	43	10.5	93	J25Q.1.77S-XJT		
J25Q.1.100S	25	100	40	117	Q.S		X ₅	6.2*12L	13	102	47	15	13	111	J25Q.1.77S-FJT		
J25Q.1.103S	25	103	40	120	Q.S				F-Q	6	13	125	47	15	13	134	J25Q.1.100S-FJT
J25Q.1.125S	25	125	40	142	Q.S				F-Q	6	13	128	47	15	13	137	J25Q.1.103S-FJT
									F-Q	6	13	150	47	15	13	159	J25Q.1.125S-FJT

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

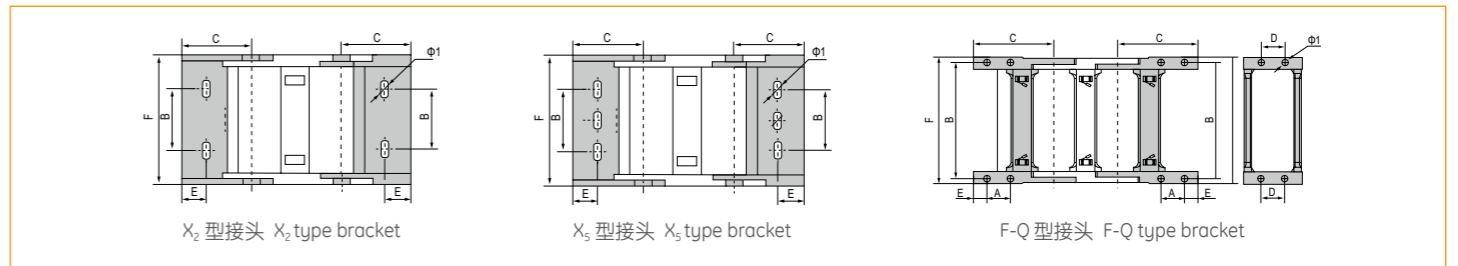

订货示例 Order Example

示例 拖链内高 25mm、内宽 38mm、半径 55mm、长度 1 米 /22 节 (Sample: inner height 25mm, inner width 38mm, radius 55mm, length 22 links/1 meter)

拖链 chain J25Q.1.38S R55 1000mm /22 Links
接头 Bracket J25Q.1.38S-XJT 1 副 (Set)


配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

J25F.1.S 系列 - 封闭两侧可打开


Series of J25F.1.S-Enclosed type both side opening

JFLO®

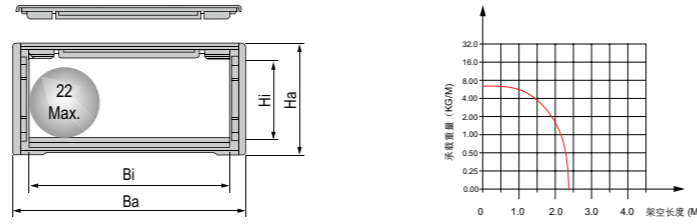

适用于直径 22 毫米以下线缆 Suitable for 22mm or less of cable.


主要技术参数 Basic technical data

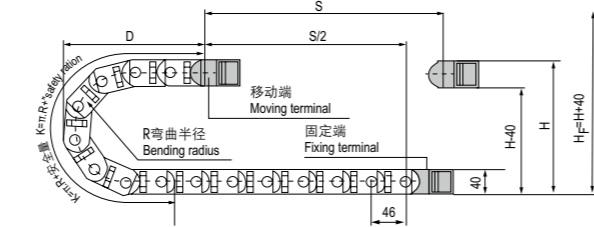

节距=46mm, 每米节数=22, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	75	100	125	150	225
H	190	240	290	340	490
D	141	166	191	216	291
K	368	414	506	598	828


安装实际高度:H_f=H+40mm(负载 1.0kg/m)
Actual mounting height:H_f=H+40mm(load 1.0kg/m)

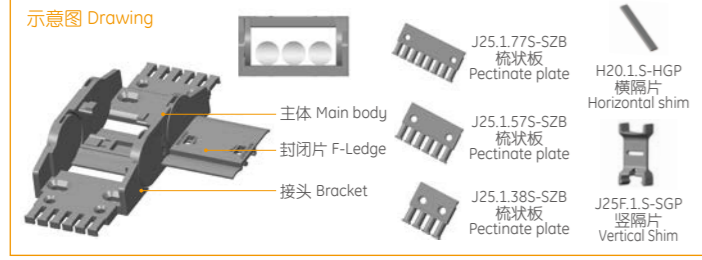

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm) hole distance					接头代号 Bracket No.	
J25F.1.38S	25	38	40	55	F.S	75,100,125,150,225	X ₂	6*12L	25	47	10	54	J25F.1.38S-XJT		
J25F.1.50S	25	50	40	67	F.S		F-F	6	13	63	47	15	13	72	J25F.1.38S-FJT
J25F.1.57S	25	57	40	74	F.S		X ₂	6*12L	44	43	10	73	J25F.1.57S-XJT		
J25F.1.60S	25	60	40	77	F.S		F-F	6	13	82	47	15	13	91	J25F.1.57S-FJT
J25F.1.75S	25	75	40	92	F.S		F-F	6	13	85	47	15	13	94	J25F.1.60S-FJT
J25F.1.77S	25	77	40	94	F.S		F-F	6	13	100	47	15	13	109	J25F.1.75S-FJT
J25F.1.77S	25	77	40	94	F.S		X ₅	6*12L	64	43	10	93	J25F.1.77S-XJT		
J25F.1.77S	25	77	40	94	F.S		F-F	6	13	102	47	15	13	111	J25F.1.77S-FJT
J25F.1.100S	25	100	40	117	F.S		F-F	6	13	125	47	15	13	134	J25F.1.100S-FJT

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

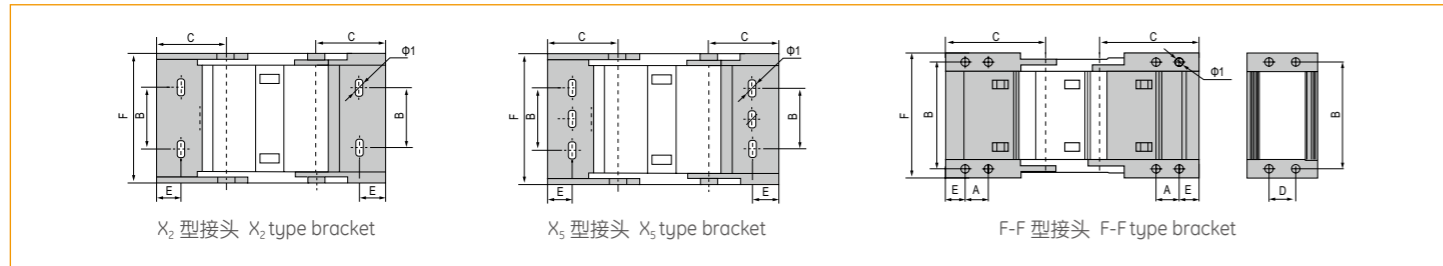


订货示例 Order Example

示例 拖链内高 25mm、内宽 38mm、半径 75mm、长度 1 米 /22 节 (Sample: inner height 25mm, inner width 38mm, radius 75mm, length 1 meter /22 links)
 拖链 chain J25F.1.38S R75 1000mm /22 Links
 接头 Bracket J25F.1.38S-XJT 1 副 (Set)
 配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)
 注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JFLO®


J25Q.2.S 系列 - 桥式两侧可打开

Series of J25Q.2.S-Bridge type open of both side

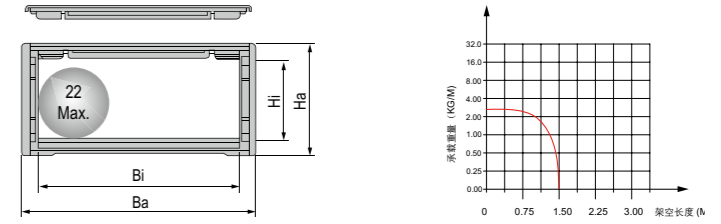

适用于直径 22 毫米以下线缆 Suitable for 22mm or less of cable.


主要技术参数 Basic technical data

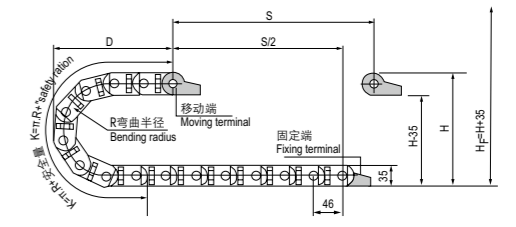

节距=46mm, 每米节数=22, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	40	55	75	100	125	150	175	190	200	250
H	115	145	185	235	285	335	385	415	435	535
D	104	119	139	164	189	214	239	254	264	314
K	230	276	368	414	506	598	644	690	736	920


安装实际高度:H_f=H+35mm(负载 1.0kg/m)
Actual mounting height:H_f=H+35mm(load 1.0kg/m)

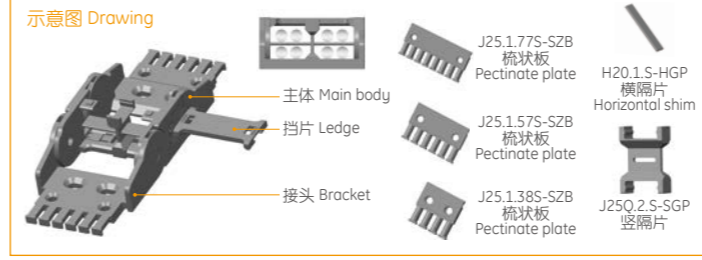

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters						
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm) hole distance				
J25Q.2.25S	25	25	35	40	Q.S	40,55,75,100,125,150,175,190,200,250	X ₂	6.2*9L	14	41	12	40	J25Q.2.25S-XJT
J25Q.2.25S	25	25	35	40	Q.S		F-Q	6	50	33	10	60	J25Q.2.25S-XJT
J25Q.2.38S	25	38	35	53	Q.S		X ₂	6*10L	25	41	12	53	J25Q.2.38S-XJT
J25Q.2.38S	25	38	35	53	Q.S		F-Q	6	63	33	10	73	J25Q.2.38S-FJT
J25Q.2.50S	25	50	35	65	Q.S		X ₂	6*10L	37	41	12	65	J25Q.2.60S-XJT
J25Q.2.50S	25	50	35	65	Q.S		F-Q	6	75	33	10	85	J25Q.2.50S-FJT
J25Q.2.57S	25	57	35	72	Q.S		X ₂	6*10L	45	41	12	72	J25Q.2.57S-XJT
J25Q.2.57S	25	57	35	72	Q.S		F-Q	6	82	33	10	92	J25Q.2.57S-FJT
J25Q.2.77S	25	77	35	92	Q.S		X ₅	6*12L	57	41	12	92	J25Q.2.77S-XJT
J25Q.2.77S	25	77	35	92	Q.S		F-Q	6	102	33	10	112	J25Q.2.77S-FJT

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

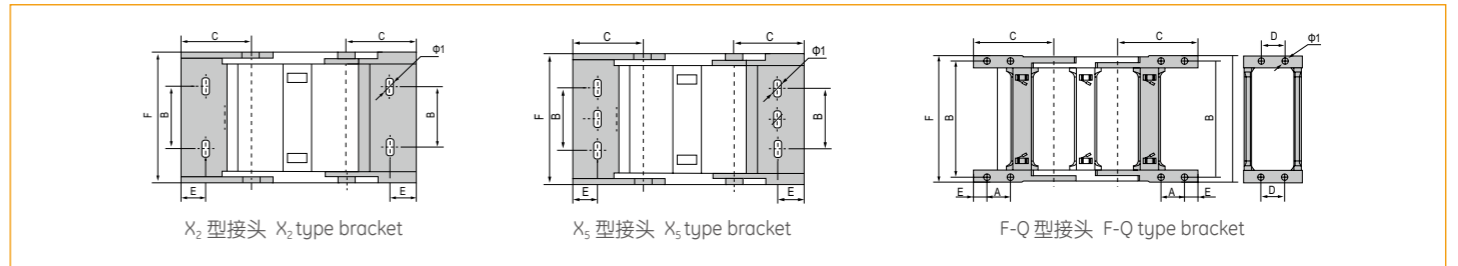


订货示例 Order Example

示例 拖链内高 25mm、内宽 25mm、半径 55mm、长度 1 米 /22 节 (Sample: inner height 25mm, inner width 25mm, radius 55mm, length 1 meter /22 links)
 拖链 chain J25Q.2.25S R55 1000mm /22 Links
 接头 Bracket J25Q.2.25S-XJT 1 副 (Set)
 配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)
 注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

J25F.2.S 系列 - 封闭两侧可打开


Series of J25F.2.S-Enclosed type both side opening

JFLO®

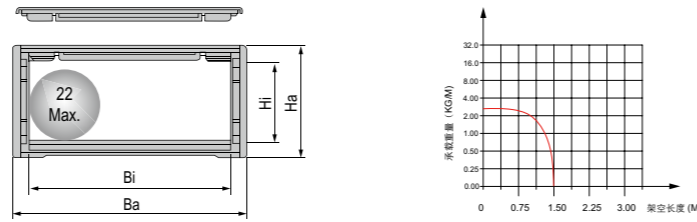

适用于直径 22 毫米以下线缆 Suitable for 22mm or less of cable.


主要技术参数 Basic technical data

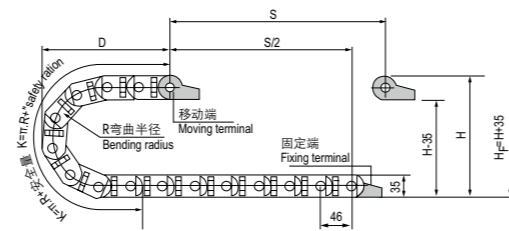

节距=46mm, 每米节数=22, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke, K=π.R+“safety ration”

R	40	55	75	100	125	150	175	190	200	250
H	115	145	185	235	285	335	385	415	435	535
D	104	119	139	164	189	214	239	254	264	314
K	230	276	368	368	506	598	644	690	736	920


安装实际高度:H_F=H+35mm(负载 1.0kg/m)
Actual mounting height:H_F=H+35mm(load 1.0kg/m)

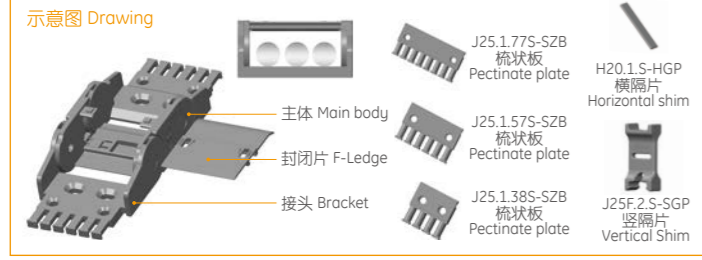

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
J25F.2.25S	25	25	35	40	F.S	75,100,125,150, 175,190,200,250	X ₂	6.2*9L	A	B	C	D	E	F	J25F.2.25S-XJT	
							F-F	6	14	41	12	40	50	33	10	60
J25F.2.38S	25	38	35	53	F.S	75,100,125,150, 175,190,200,250	X ₂	6*10L	25	41	12	53			J25F.2.38S-XJT	
							F-F	6	63	33	10	73				J25F.2.38S-FJT
J25F.2.57S	25	57	35	72	F.S	40,55,75,100,125, 150,175,190,200,250	X ₂	6*10L	45	41	12	72			J25F.2.57S-XJT	
							F-F	6	82	33	10	92				J25F.2.57S-FJT
J25F.2.77S	25	77	35	92	F.S	75,100,125,150, 175,190,200,250	X ₅	6*12L	57	41	12	92			J25F.2.77S-XJT	
							F-F	6	102	33	10	112				J25F.2.77S-FJT

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

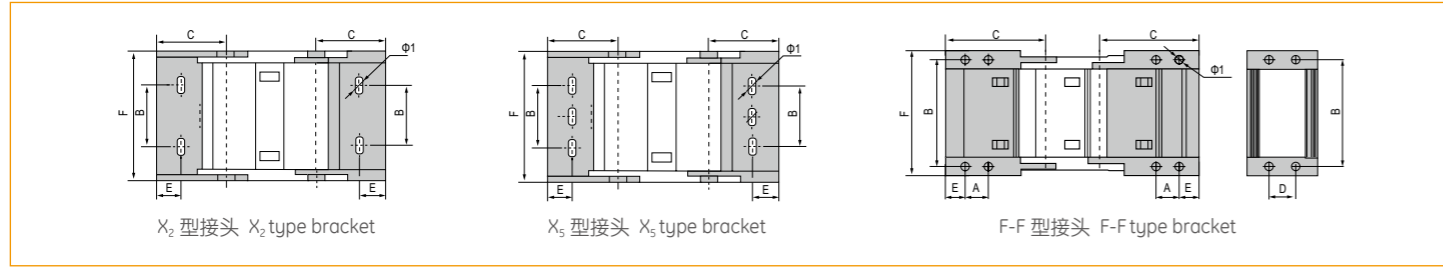


订货示例 Order Example

示例 拖链内高 25mm、内宽 25mm、半径 75mm、长度 1 米 /22 节 (Sample: inner height 25mm, inner width 25mm, radius 75mm, length 1 meter /22 links)
 拖链 Chain J25F.2.25S R75 1000mm /22 Links
 接头 Bracket J25F.2.25S-XJT 1 副 (Set)
 配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)
 注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JFLO®


J25Q.3.N 系列 - 桥式内侧可打开

Series of J25Q.3.N-Bridge type interior opening

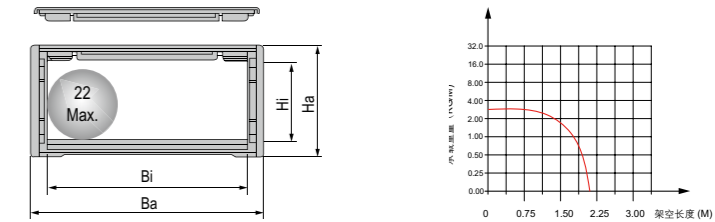

适用于直径 22 毫米以下线缆 Suitable for 22mm or less of cable.


主要技术参数 Basic technical data

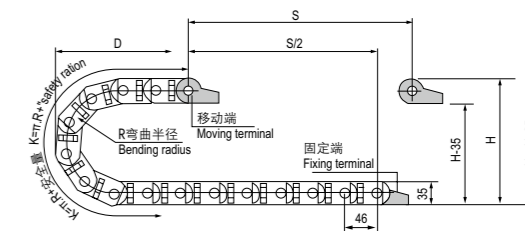

节距=46mm, 每米节数=22, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke, K=π.R+“safety ration”

R	55	75	100
H	145	185	234
D	119	139	164
K	276	368	414


安装实际高度:H_F=H+35mm(负载 1.0kg/m)
Actual mounting height:H_F=H+35mm(load 1.0kg/m)

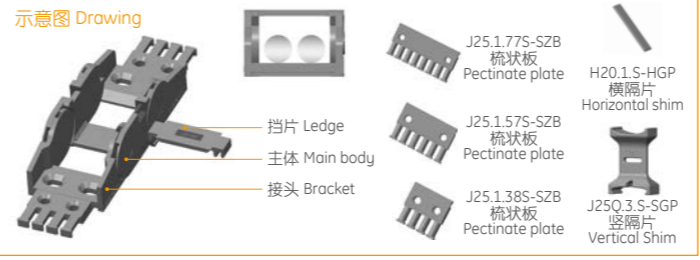

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
J25Q.3.38N	25	38	35	54	Q.N	55,75,100	X ₂	6*10L	25	41	12	54			J25Q.3.38N-XJT	
J25Q.3.57N	25	57	35	73	Q.N		X ₂	6*10L	45	41	12	73			J25Q.3.57N-XJT	
J25Q.3.77N	25	77	35	93	Q.N	55,100	X ₅	6*12L	57	41	12	93			J25Q.3.77N-XJT	

注: N 表示内侧打开 Note: N indicates that the interior opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

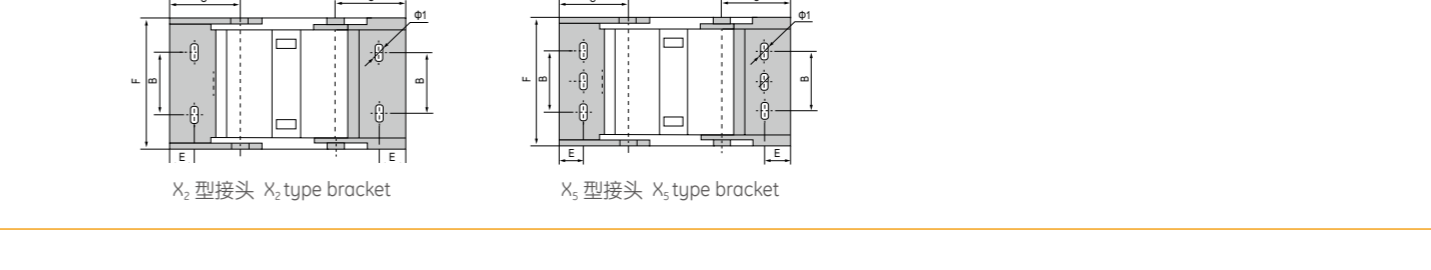

订货示例 Order Example

示例 拖链内高 25mm、内宽 38mm、半径 55mm、长度 1 米 /22 节 (Sample: inner height 25mm, inner width 38mm, radius 55mm, length 1 meter /22 links)
 拖链 Chain J25Q.3.38N R55 1000mm /22 Links
 接头 Bracket J25Q.3.38N-XJT 1 副 (Set)
 配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)
 注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

J30Q.1.S 系列 - 桥式两侧可打开


Series of J30Q.1.S-Bridge type open of both side

JFLO®



适用于直径 27 毫米以下线缆 Suitable for 27mm or less of cable.

主要技术参数 Basic technical data

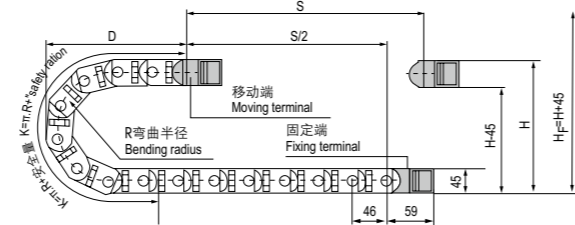


节距 =46mm, 每米节数 =22, 链长 =S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	75	100	150
H	195	245	345
D	144	169	219
K	368	414	598

安装实际高度 :H_f=H+45mm(负载 1.0kg/m)
Actual mounting height:H_f=H+45mm(load 1.0kg/m)


示意图 Drawing

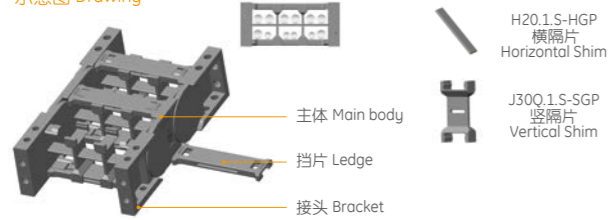

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J30Q.1.38S	30	38	45	54	Q.S	75,100,150	F-Q	5.5	15	50	59	17	13	62	J30Q.1.38S-FJT
J30Q.1.50S	30	50	45	66	Q.S		F-Q	5.5	15	62	59	17	13	74	J30Q.1.50S-FJT
J30Q.1.57S	30	57	45	73	Q.S		F-Q	5.5	15	69	59	17	13	81	J30Q.1.57S-FJT
J30Q.1.60S	30	60	45	76	Q.S		F-Q	5.5	15	72	59	17	13	84	J30Q.1.60S-FJT
J30Q.1.75S	30	75	45	91	Q.S		F-Q	5.5	15	87	59	17	13	99	J30Q.1.75S-FJT
J30Q.1.77S	30	77	45	93	Q.S		F-Q	5.5	15	89	59	17	13	101	J30Q.1.77S-FJT
J30Q.1.100S	30	100	45	116	Q.S		F-Q	5.5	15	112	59	17	13	124	J30Q.1.100S-FJT
J30Q.1.103S	30	103	45	119	Q.S		F-Q	5.5	15	115	59	17	13	127	J30Q.1.103S-FJT
J30Q.1.125S	30	125	45	141	Q.S		F-Q	5.5	15	137	59	17	13	149	J30Q.1.125S-FJT

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

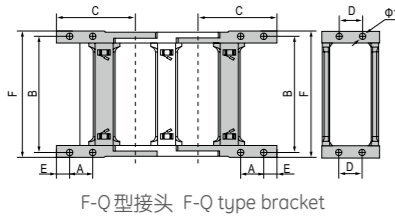

F-Q 型接头 F-Q type bracket

订货示例 Order Example

示例 拖链内高 30mm、内宽 38mm、半径 75mm、长度 1 米 /22 节 (Sample: inner height 30mm, inner width 38mm, radius 75mm, length 22 links/1 meter)

拖链 Chain J30Q.1.38S R75 1000mm /22 Links

接头 Bracket J30Q.1.38S -XJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JFLO®


J30F.1.S 系列 - 封闭两侧可打开

Series of J30F.1.S-Enclosed type both side opening



适用于直径 27 毫米以下线缆 Suitable for 27mm or less of cable.

主要技术参数 Basic technical data

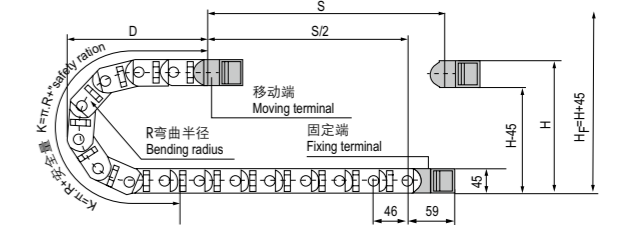


节距 =46mm, 每米节数 =22, 链长 =S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	75	100	150
H	195	245	345
D	144	169	219
K	368	414	598

安装实际高度 :H_f=H+45mm(负载 1.0kg/m)
Actual mounting height:H_f=H+45mm(load 1.0kg/m)


示意图 Drawing

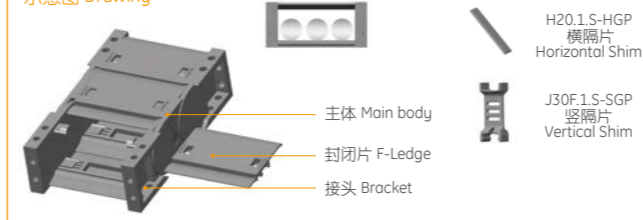

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J30F.1.38S	30	38	45	54	F.S	75,100,150	F-F	5.5	15	50	59	17	13	62	J30F.1.38S-FJT
J30F.1.50S	30	50	45	66	F.S		F-F	5.5	15	62	59	17	13	74	J30F.1.50S-FJT
J30F.1.57S	30	57	45	73	F.S		F-F	5.5	15	69	59	17	13	81	J30F.1.57S-FJT
J30F.1.60S	30	60	45	76	F.S		F-F	5.5	15	72	59	17	13	84	J30F.1.60S-FJT
J30F.1.75S	30	75	45	91	F.S		F-F	5.5	15	87	59	17	13	99	J30F.1.75S-FJT
J30F.1.77S	30	77	45	93	F.S		F-F	5.5	15	89	59	17	13	101	J30F.1.77S-FJT
J30F.1.100S	30	100	45	116	F.S		F-F	5.5	15	112	59	17	13	124	J30F.1.100S-FJT

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

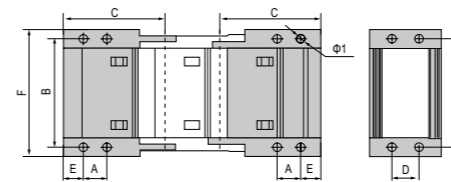

F-F 型接头 F-F type bracket

订货示例 Order Example

示例 拖链内高 30mm、内宽 38mm、半径 75mm、长度 1 米 /22 节 (Sample: inner height 30mm, inner width 38mm, radius 75mm, length 22 links/1 meter)

拖链 Chain J30F.1.38S R75 1000mm /22 Links

接头 Bracket J30F.1.38S -XJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

J35Q.1.S 系列 - 桥式两侧可打开


Series of J35Q.1.S-Bridge type open of both side

JFLO®



适用于直径 32 毫米以下线缆 Suitable for 32mm or less of cable.

主要技术参数 Basic technical data

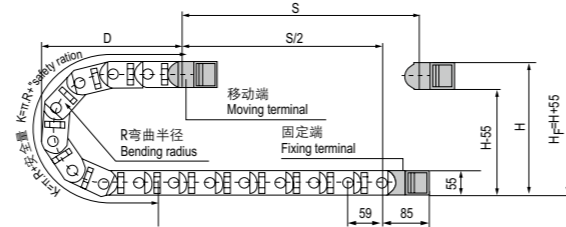


节距 = 59mm, 每米节数 = 17, 链长 = S/2 + K, S = 行程距离, K = π · R + "安全量"
Pitch = 59mm, link per meter = 17, length of chain = S/2 + K, S = stroke, K = π · R + "safety ration"

R	75	100	125	150	200	250
H	205	255	305	355	455	555
D	162	187	212	237	287	337
K	354	472	531	590	767	944

安装实际高度 : $H_f = H + 55\text{mm}$ (负载 1.0kg/m)
Actual mounting height: $H_f = H + 55\text{mm}$ (load 1.0kg/m)


示意图 Drawing

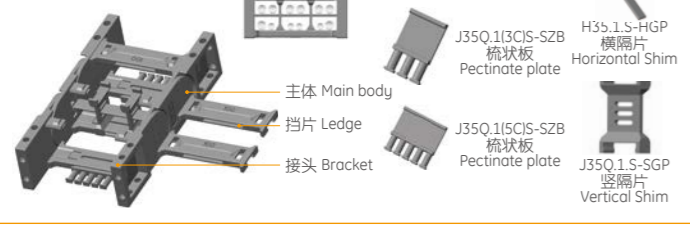

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm) hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J35Q.1.50S	35	50	55	70	Q.S	75,100,125, 150,200,250	F-Q	7.2	24	64	85	26	15	76	J35Q.1.50S-FJT
J35Q.1.60S	35	60	55	80	Q.S		F-Q	7.2	24	74	85	26	15	86	J35Q.1.60S-FJT
J35Q.1.75S	35	75	55	95	Q.S		F-Q	7.2	24	89	85	26	15	101	J35Q.1.75S-FJT
J35Q.1.90S	35	90	55	110	Q.S		F-Q	7.2	24	104	85	26	15	116	J35Q.1.90S-FJT
J35Q.1.100S	35	100	55	120	Q.S		F-Q	7.2	24	114	85	26	15	126	J35Q.1.100S-FJT
J35Q.1.117S	35	117	55	137	Q.S		F-Q	7.2	24	131	85	26	15	143	J35Q.1.117S-FJT
J35Q.1.125S	35	125	55	145	Q.S		F-Q	7.2	24	139	85	26	15	151	J35Q.1.125S-FJT
J35Q.1.130S	35	130	55	150	Q.S		F-Q	7.2	24	144	85	26	15	156	J35Q.1.130S-FJT
J35Q.1.150S	35	150	55	170	Q.S		F-Q	7.2	24	164	85	26	15	176	J35Q.1.150S-FJT
J35Q.1.154S	35	154	55	174	Q.S		F-Q	7.2	24	168	85	26	15	180	J35Q.1.154S-FJT
J35Q.1.175S	35	175	55	195	Q.S		F-Q	7.2	24	189	85	26	15	201	J35Q.1.175S-FJT
J35Q.1.200S	35	200	55	220	Q.S		F-Q	7.2	24	214	85	26	15	226	J35Q.1.200S-FJT
J35Q.1.250S	35	250	55	270	Q.S		F-Q	7.2	24	264	85	26	15	276	J35Q.1.250S-FJT
J35Q.1.300S	35	300	55	320	Q.S		F-Q	7.2	24	314	85	26	15	326	J35Q.1.300S-FJT

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

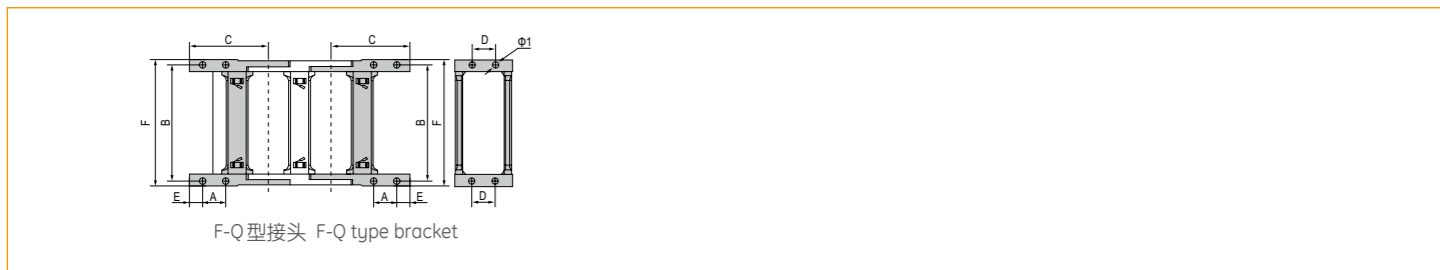

订货示例 Order Example

示例 拖链内高 35mm、内宽 50mm、半径 75mm、长度 1 米 / 17 节 (Sample: inner height 35mm, inner width 50mm, radius 75mm, length 1 meter / 17 links)

拖链 Chain J35Q.1.50S R75 1000mm / 17 Links

接头 Bracket J35Q.1.50S -XJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JFLO®


J35F.1.S 系列 - 封闭两侧可打开

Series of J35F.1.S-Enclosed type both side opening



适用于直径 32 毫米以下线缆 Suitable for 32mm or less of cable.

主要技术参数 Basic technical data

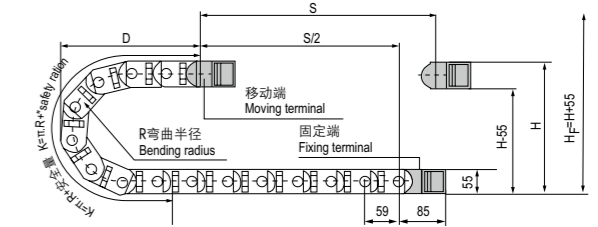


节距 = 59mm, 每米节数 = 17, 链长 = S/2 + K, S = 行程距离, K = π · R + "安全量"
Pitch = 59mm, link per meter = 17, length of chain = S/2 + K, S = stroke, K = π · R + "safety ration"

R	75	100	125	150	200	250
H	205	255	305	355	455	555
D	162	187	212	237	287	337
K	354	472	531	590	767	944

安装实际高度 : $H_f = H + 55\text{mm}$ (负载 1.0kg/m)
Actual mounting height: $H_f = H + 55\text{mm}$ (load 1.0kg/m)


示意图 Drawing

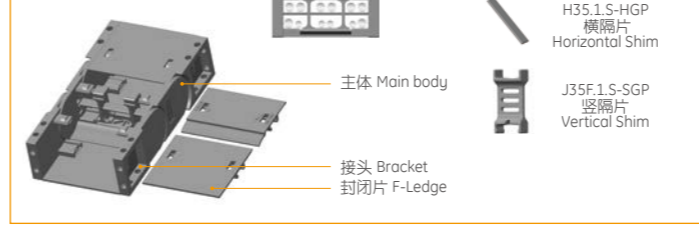

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm) hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J35F.1.50S	35	50	55	70	F.S	75,100, 125,150, 200,250	F-F	7.2	24	64	85	26	15	76	J35F.1.50S-FJT
J35F.1.75S	35	75	55	95	F.S		F-F	7.2	24	89	85	26	15	101	J35F.1.75S-FJT
J35F.1.100S	35	100	55	120	F.S		F-F	7.2	24	114	85	26	15	126	J35F.1.100S-FJT
J35F.1.125S	35	125	55	145	F.S		F-F	7.2	24	139	85	26	15	151	J35F.1.125S-FJT
J35F.1.150S	35	150	55	170	F.S		F-F	7.2	24	164	85	26	15	176	J35F.1.150S-FJT

注: S 表示两侧可打开, F 表示全封闭 Note: S indicates that the both side open, F indicates that the Enclosed

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

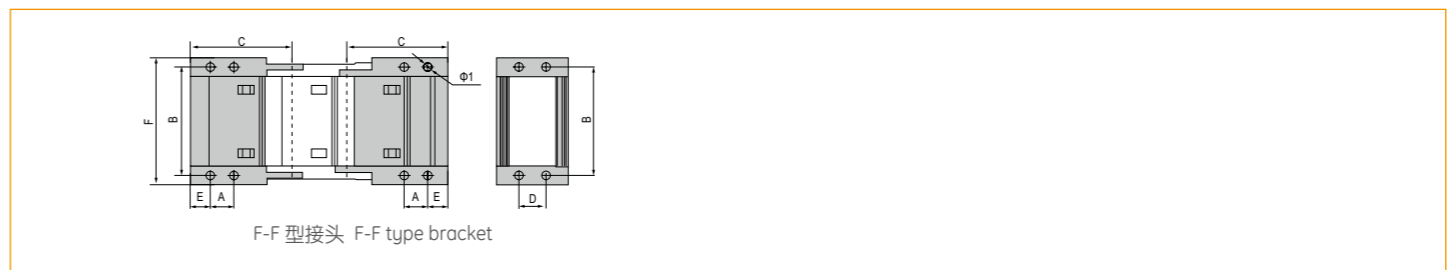

订货示例 Order Example

示例 拖链内高 35mm、内宽 50mm、半径 75mm、长度 1 米 / 17 节 (Sample: inner height 35mm, inner width 50mm, radius 75mm, length 1 meter / 17 links)

拖链 Chain J35F.1.50S R75 1000mm / 17 Links

接头 Bracket J35F.1.50S -XJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

J35Q.2.S 系列 - 桥式两侧可打开


Series of J35Q.2.S-Bridge type open of both side

JFLO®



适用于直径 32 毫米以下线缆 Suitable for 32mm or less of cable.

主要技术参数 Basic technical data

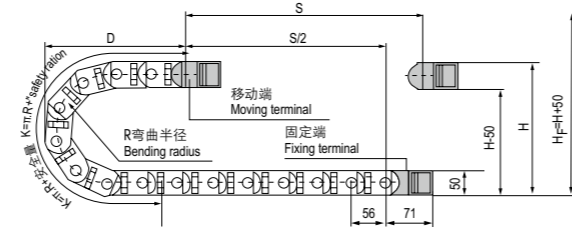


节距 =56mm, 每米节数 =18, 链长 =S/2+K, S= 行程距离, K=π.R+ "安全量"
Pitch=56mm, link per meter=18, length of chain=S/2+K, S=stroke. K=π.R+"safety ration"

R	75	150
H	200	350
D	156	231
K	392	616

安装实际高度 :H_f=H+50mm(负载 1.0kg/m)
Actual mounting height:H_f=H+50mm(load 1.0kg/m)


示意图 Drawing

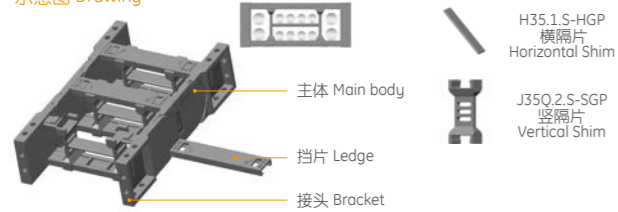

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J35Q.2.50S	35	50	50	67	Q.S	75,150	F-Q	5.2	15	63	71	17	12	75	J35Q.2.50S-FJT
J35Q.2.100S	35	100	50	117	Q.S		F-Q	5.2	15	113	71	17	12	125	J35Q.2.100S-FJT
J35Q.2.125S	35	125	50	142	Q.S		F-Q	5.2	15	138	71	17	12	150	J35Q.2.125S-FJT

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

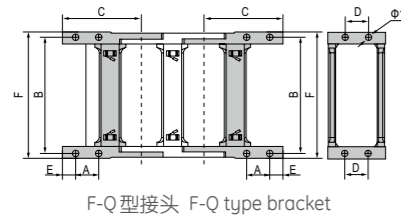

订货示例 Order Example

示例 拖链内高 35mm、内宽 50mm、半径 75mm、长度 1 米 /18 节 (Sample: inner height 35mm, inner width 50mm, radius 75mm, length 18 links/1 meter)

拖链 Chain J35Q.2.50S R75 1000mm /18 Links

接头 Bracket J35Q.2.50S -XJT 1 副 (Set)


配件 Accessories 每节装 1 个竖隔片 /1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JFLO®


J35Q.3.W 系列 (连体)- 桥式外侧开

Series of J35Q.3.W(Connection)-Bridge type exterior opening

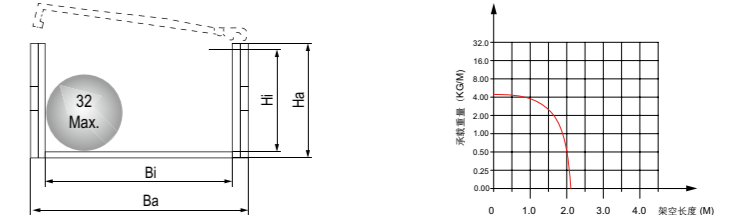

适用于直径 32 毫米以下线缆 Suitable for 32mm or less of cable.

主要技术参数 Basic technical data

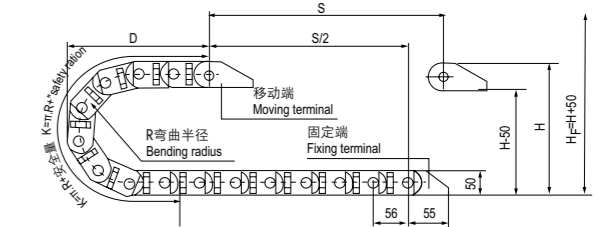


节距 =56mm, 每米节数 =18, 链长 =S/2+K, S= 行程距离, K=π.R+ "安全量"
Pitch=56mm, link per meter=18, length of chain=S/2+K, S=stroke. K=π.R+"safety ration"

R	75	150
H	200	350
D	156	231
K	392	616

安装实际高度 :H_f=H+50mm(负载 1.0kg/m)
Actual mounting height:H_f=H+50mm(load 1.0kg/m)


示意图 Drawing

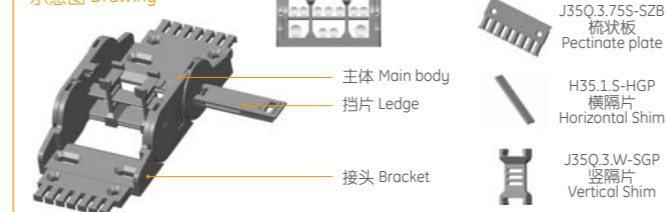

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J35Q.3.75W	35	75	50	92	Q.W	75,150	X ₂	6.2*19L	55	55	17	93	J35Q.3.75W-XJT		

注: W 表示外侧开 Note:W Bridge type exterior opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



订货示例 Order Example

示例 拖链内高 35mm、内宽 75mm、半径 75mm、长度 1 米 /18 节 (Sample: inner height 35mm, inner width 75mm, radius 75mm, length 18 links/1 meter)

拖链 chain J35Q.3.75S R75 1000mm /18 Links

接头 Bracket J35Q.3.75S -XJT 1 副 (Set)


配件 Accessories 每节装 1 个竖隔片 /1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

J45Q.1.S 系列 - 桥式两侧可打开


Series of J45Q.1.S-Bridge type open of both side

JFLO®

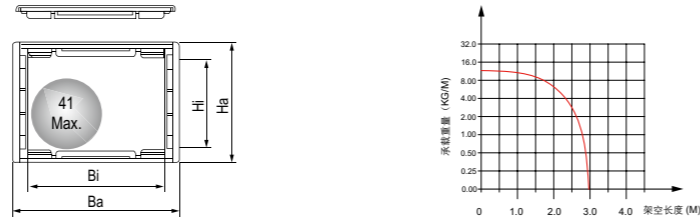

适用于直径 41 毫米以下线缆 Suitable for 41mm or less of cable.

主要技术参数 Basic technical data

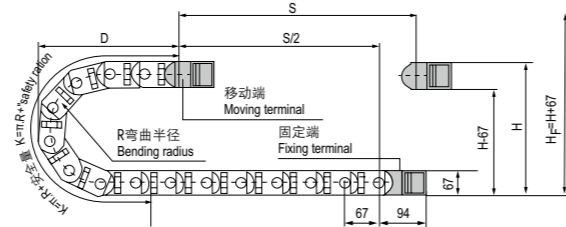


节距=67mm, 每米节数=15, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=67mm, link per meter=15, length of chain=S/2+K, S=stroke, K=π.R+“safety ration”

R	100	125	150	175	200	225	250	300
H	267	317	367	417	467	517	567	667
D	201	226	251	275	301	326	351	401
K	469	536	670	737	804	871	938	1139

安装实际高度: $H_f = H + 67\text{mm}$ (负载 2.2kg/m)
Actual mounting height: $H_f = H + 67\text{mm}$ (load 2.2kg/m)

示意图 Drawing

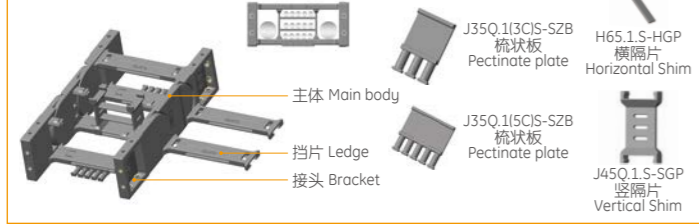

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm) hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J45Q.1.50S	45	50	67	74	Q.S	100,125,150, 175,200,225, 250,300	F-Q	6	24	65	94	26	15	80	J45Q.1.50S-FJT
J45Q.1.60S	45	60	67	84	Q.S		F-Q	6	24	75	94	26	15	90	J45Q.1.60S-FJT
J45Q.1.75S	45	75	67	99	Q.S		F-Q	6	24	90	94	26	15	105	J45Q.1.75S-FJT
J45Q.1.90S	45	90	67	114	Q.S		F-Q	6	24	105	94	26	15	120	J45Q.1.90S-FJT
J45Q.1.100S	45	100	67	124	Q.S		F-Q	6	24	115	94	26	15	130	J45Q.1.100S-FJT
J45Q.1.117S	45	117	67	141	Q.S		F-Q	6	24	132	94	26	15	147	J45Q.1.117S-FJT
J45Q.1.125S	45	125	67	149	Q.S		F-Q	6	24	140	94	26	15	155	J45Q.1.125S-FJT
J45Q.1.130S	45	130	67	154	Q.S		F-Q	6	24	145	94	26	15	160	J45Q.1.130S-FJT
J45Q.1.150S	45	150	67	174	Q.S		F-Q	6	24	165	94	26	15	180	J45Q.1.150S-FJT
J45Q.1.154S	45	154	67	178	Q.S		F-Q	6	24	169	94	26	15	184	J45Q.1.154S-FJT
J45Q.1.175S	45	175	67	199	Q.S		F-Q	6	24	190	94	26	15	205	J45Q.1.175S-FJT
J45Q.1.200S	45	200	67	224	Q.S		F-Q	6	24	215	94	26	15	230	J45Q.1.200S-FJT
J45Q.1.250S	45	250	67	274	Q.S		F-Q	6	24	265	94	26	15	280	J45Q.1.250S-FJT
J45Q.1.300S	45	300	67	324	Q.S		F-Q	6	24	315	94	26	15	330	J45Q.1.300S-FJT

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



订货示例 Order Example

示例 拖链内高 45mm、内宽 50mm、半径 100mm、长度 1 米 /15 节 (Sample: inner height 45mm, inner width 50mm, radius 100mm, length 15 links/1 meter)


拖链 Chain J45Q.1.50S R100 1000mm /15 Links
接头 Bracket J45Q.1.50S -XJT 1 副 (Set)
配件 Accessories 每节装 1 个竖隔片 /1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JFLO®


J45F.1.S 系列 - 封闭两侧可打开

Series of J45F.1.S-Enclosed type both side opening

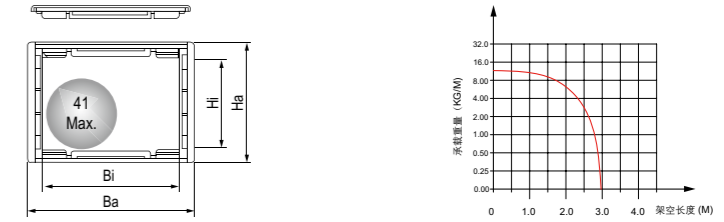

适用于直径 41 毫米以下线缆 Suitable for 41mm or less of cable.

主要技术参数 Basic technical data

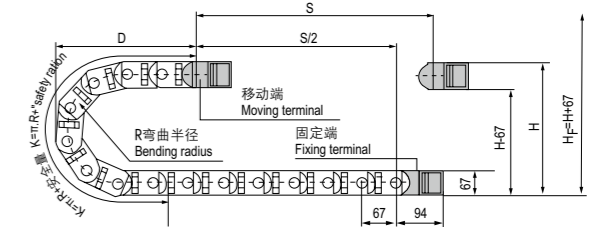


节距=67mm, 每米节数=15, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=67mm, link per meter=15, length of chain=S/2+K, S=stroke, K=π.R+“safety ration”

R	125	150	175	200	225	250	300
H	317	367	417	467	517	567	667
D	226	251	276	301	326	351	401
K	536	670	737	804	871	938	1139

安装实际高度: $H_f = H + 67\text{mm}$ (负载 2.2kg/m)
Actual mounting height: $H_f = H + 67\text{mm}$ (load 2.2kg/m)


示意图 Drawing

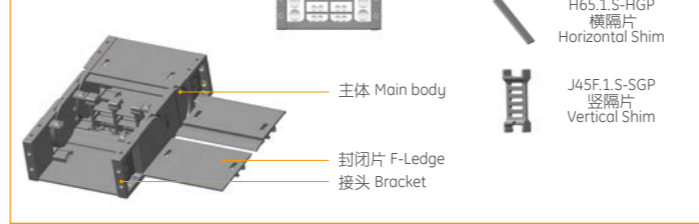

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm) hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J45F.1.75S	45	75	67	99	F.S	125,150, 175,200,225, 250,300	F-F	6	24	90	94	26	15	105	J45F.1.75S-FJT
J45F.1.100S	45	100	67	124	F.S		F-F	6	24	115	94	26	15	130	J45F.1.100S-FJT
J45F.1.125S	45	125	67	149	F.S		F-F	6	24	140	94	26	15	155	J45F.1.125S-FJT
J45F.1.150S	45	150	67	174	F.S		F-F	6	24	165	94	26	15	180	J45F.1.150S-FJT
J45F.1.175S	45	175	67	199	F.S		F-F	6	24	190	94	26	15	205	J45F.1.175S-FJT

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

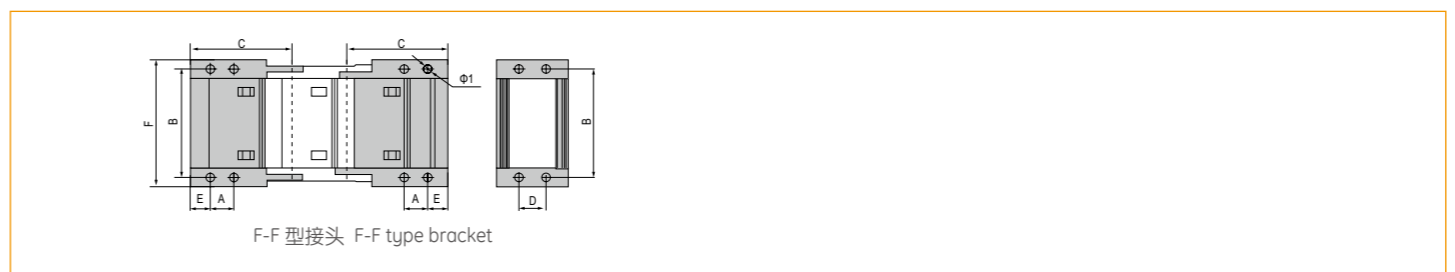

订货示例 Order Example

示例 拖链内高 45mm、内宽 75mm、半径 125mm、长度 1 米 /15 节 (Sample: inner height 45mm, inner width 75mm, radius 125mm, length 15 links/1 meter)

拖链 Chain J45F.1.75S R125 1000mm /15 Links
接头 Bracket J45F.1.75S -XJT 1 副 (Set)
配件 Accessories 每节装 1 个竖隔片 /1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

J60Q.1.S 系列 - 桥式两侧可打开


Series of J60Q.1.S-Bridge type open of both side

JFLO®



- 适用于直径 56 毫米以下线缆 Suitable for 56mm or less of cable.
- 可加装导向槽重载、长距离运行 (10~200 米)
The cable chain can be mounted guideway to overloading and long distance running (10-200 meters).

主要技术参数 Basic technical data

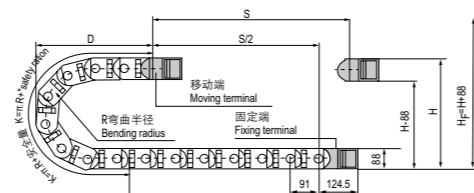

节距=91mm, 每米节数=11, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=91mm, link per meter=11, length of chain=S/2+K, S=stroke, K=π.R+“safety ration”+1 Pitch

R	135	150	175	200	250	300	450
H	358	388	438	488	588	688	988
D	270	285	310	335	385	435	585
K	637	728	819	910	1001	1183	1638

安装实际高度:H_f=H+88mm(负载 2.2kg/m)
Actual mounting height:H_f=H+88mm(load 2.2kg/m)


示意图 Drawing



拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance					接头代号 Bracket No.	
J60Q.1.75S	60	75	88	111	Q.S	135,150,175, 200,250, 300,450	F-Q	9	35	98	125	45	20	115	J60Q.1.75S-FJT
J60Q.1.100S	60	100	88	136	Q.S		F-Q	9	35	123	125	45	20	140	J60Q.1.100S-FJT
J60Q.1.125S	60	125	88	161	Q.S		F-Q	9	35	148	125	45	20	165	J60Q.1.125S-FJT
J60Q.1.150S	60	150	88	186	Q.S		F-Q	9	35	173	125	45	20	190	J60Q.1.150S-FJT
J60Q.1.175S	60	175	88	211	Q.S		F-Q	9	35	198	125	45	20	215	J60Q.1.175S-FJT
J60Q.1.200S	60	200	88	236	Q.S		F-Q	9	35	223	125	45	20	240	J60Q.1.200S-FJT
J60Q.1.250S	60	250	88	286	Q.S		F-Q	9	35	273	125	45	20	290	J60Q.1.250S-FJT
J60Q.1.300S	60	300	88	336	Q.S		F-Q	9	35	323	125	45	20	340	J60Q.1.300S-FJT
J60Q.1.350S	60	350	88	386	Q.S	F-Q	9	35	373	125	45	20	390	J60Q.1.350S-FJT	

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

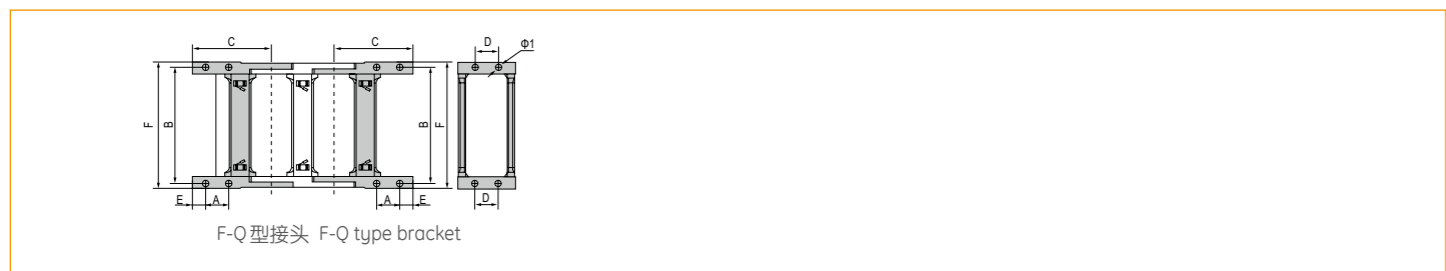


订货示例 Order Example

示例 拖链内高 60mm、内宽 75mm、半径 135mm、长度 1 米 /11 节 (Sample: inner height 60mm, inner width 75mm, radius 135mm, length 1 meter)
 拖链 Chain J60Q.1.75S R135 1000mm /11 Links
 接头 Bracket J60Q.1.75S -XJT 1 副 (Set)
 配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)
 注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.

JFLO®


JT60Q.1.S 系列 - 两侧可打开

Series of JT60Q.1.S-open of both side



- 适用于直径 56 毫米以下线缆 Suitable for 56mm or less of cable.


主要技术参数 Basic technical data

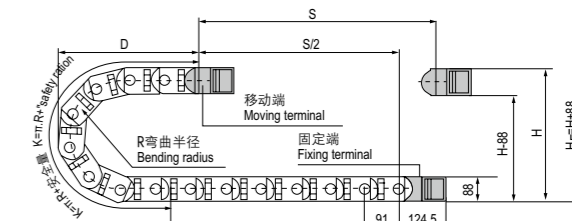


节距=91mm, 每米节数=11, ; 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=91mm, link per meter=11, ; length of chain=S/2+K, S=stroke, K=π.R+“safety ration”+1 Pitch

R	135	150	175	200	250	300	450
H	358	388	438	488	588	688	988
D	270	285	310	335	385	435	585
K	637	728	819	910	1001	1183	1638

示意图 Drawing

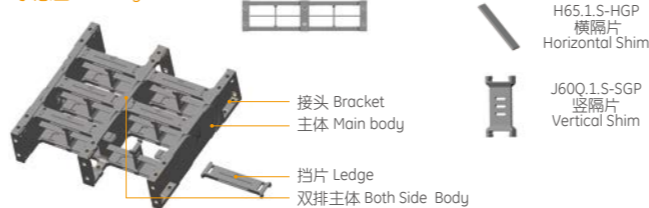

尺寸图 Dimension drawing

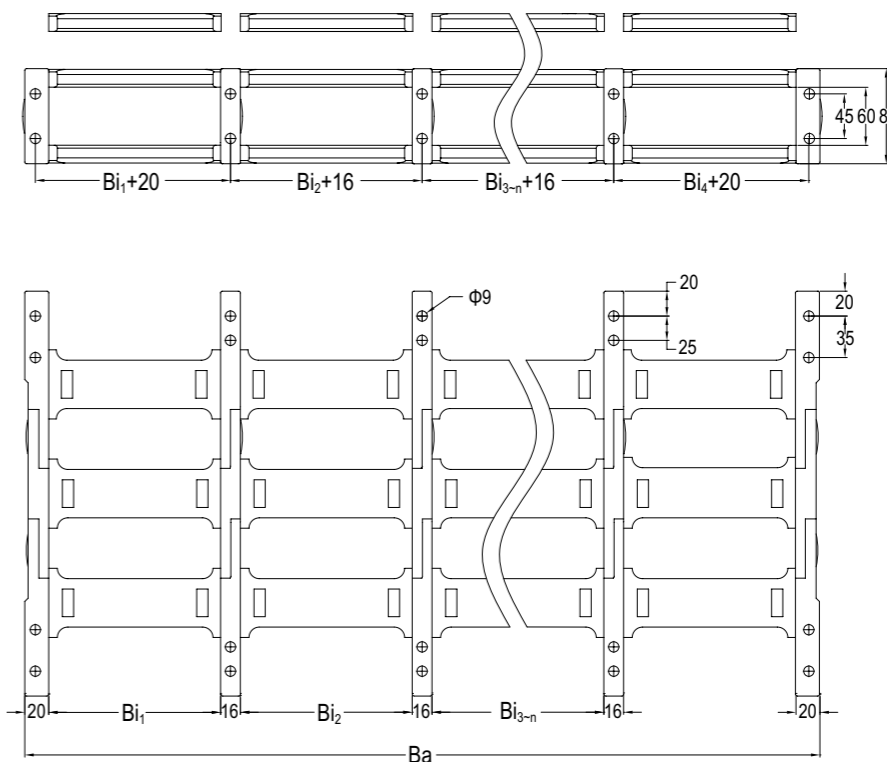

系列号 Series No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	弯曲半径 Bending radius R
JT60Q.1.S	60	135 150 175 200 250 300 450	88	Ba = 40+ (Bi1+Bi2+Bi3 +...+Bi n) + (n-1) *16	135 150 175 200 250 300 350 400 500

注: 桥式拖链与封闭式拖链可混合安装分隔片参照附录一